

ROCKPORT TRADING ZEBRA BLINDS & ROLLER SHADES



**Free Light Control
for Day and Night**




**ZEBRA BLINDS
ROLLER SHADES**

ZEBRA BLINDS



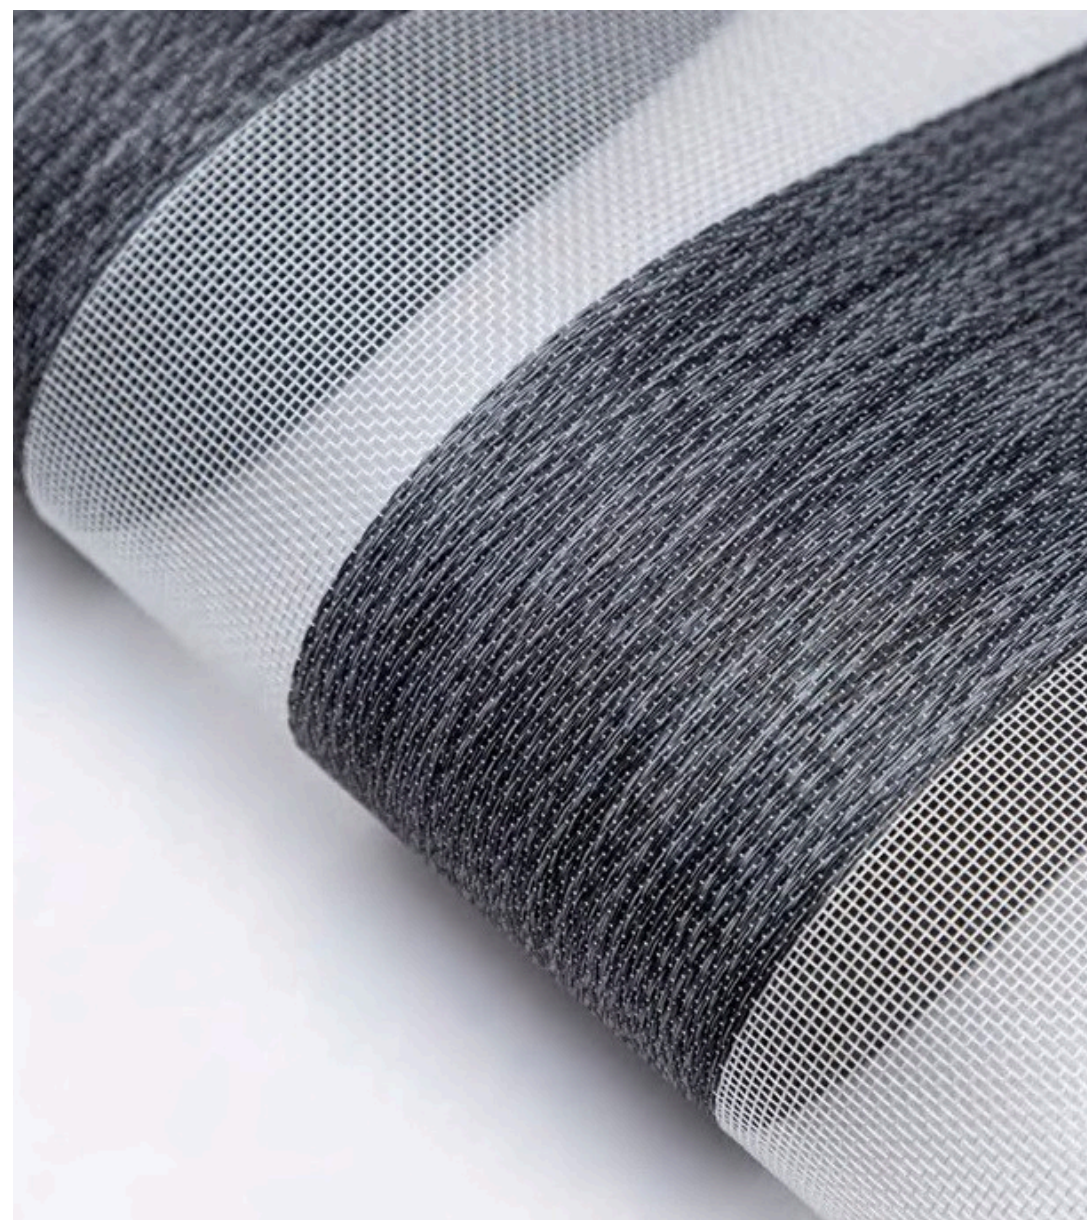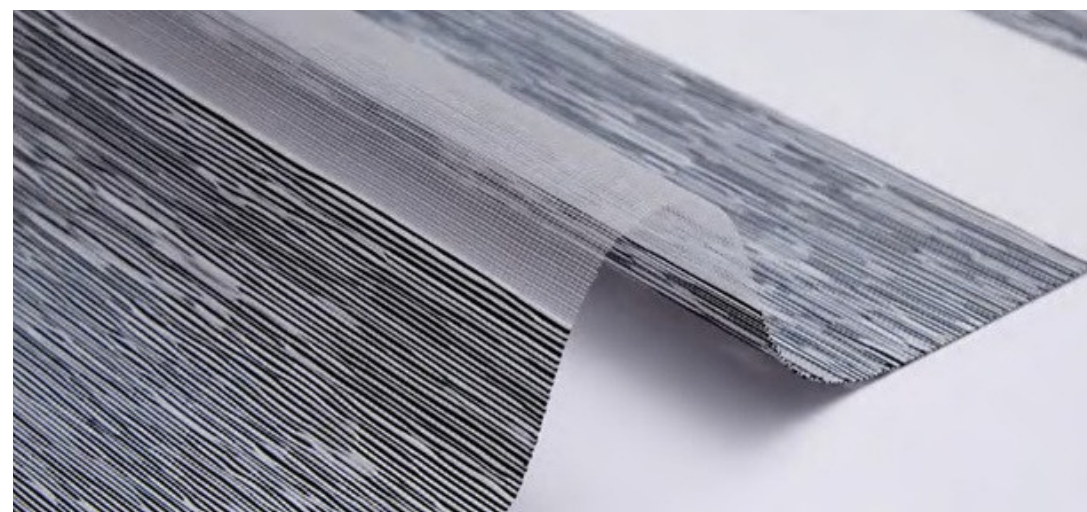







ZEBRA BLINDS

Bella
(Light Filtering)


Windows Skin

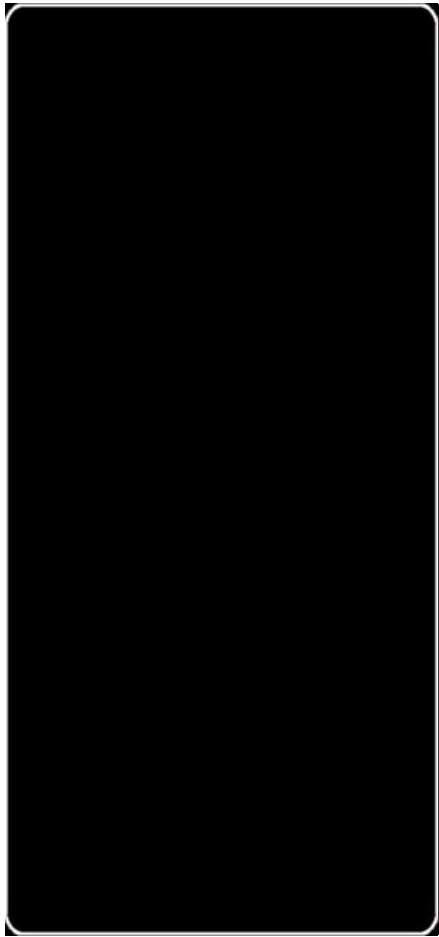


RS20287-1
Glacier

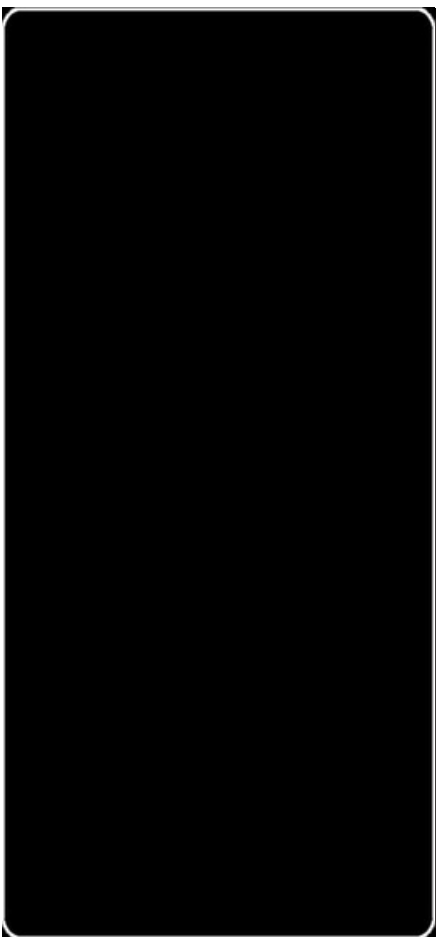


RS20287-2
Cloud

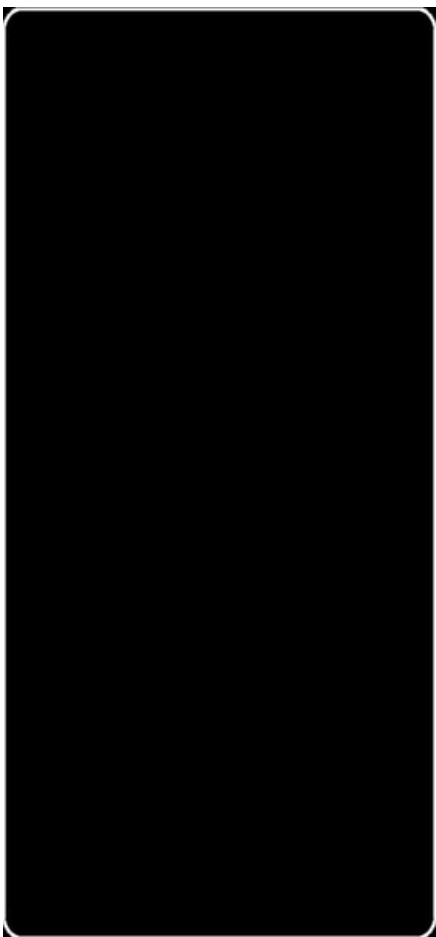

RS20287-3
Mint

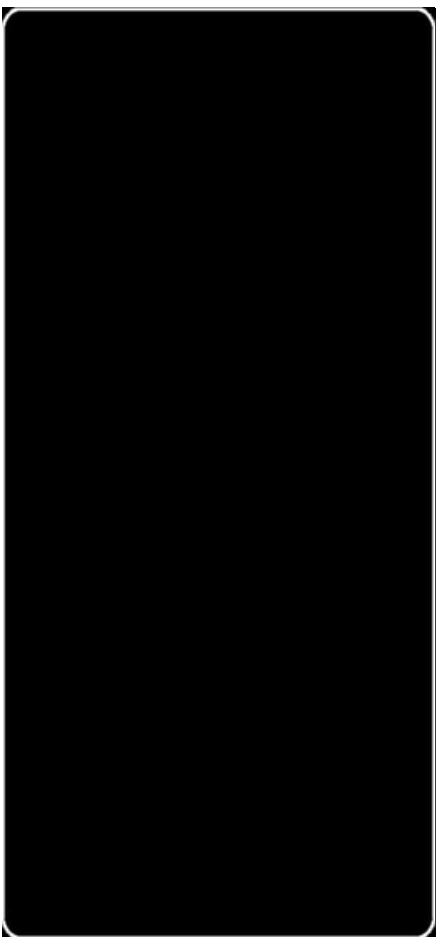

RS20287-4
Silver

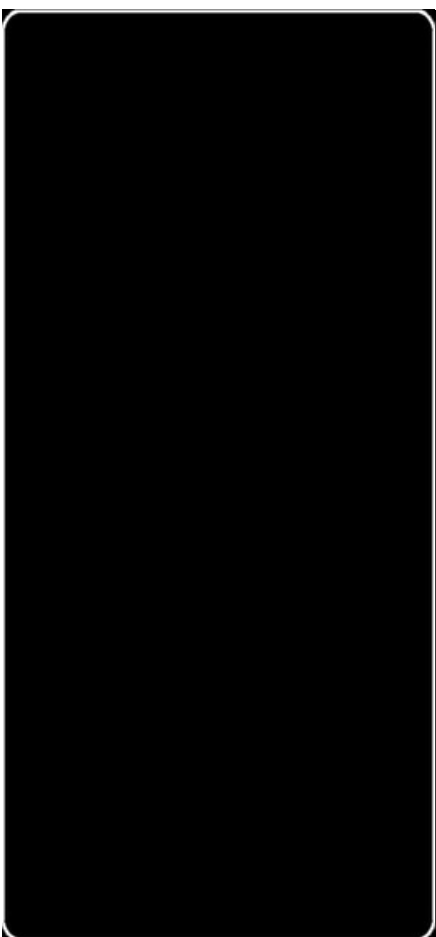

RS20287-5
Ash

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 100 ± 5% (g/m²)
3.0 ± 5% (oz/yd²)


Repeat 10 cm (Solid) x 7.0 cm (Sheer)

Light Fastness: 2.5 Grade (ISO 105 802)


ZEBRA BLINDS

Bella_(Light Filtering)


Windows Skin

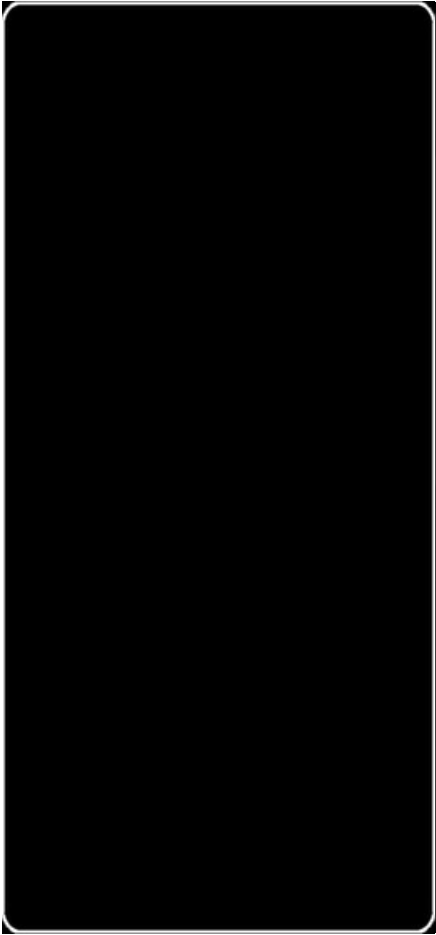


RS20287-6
Smoke

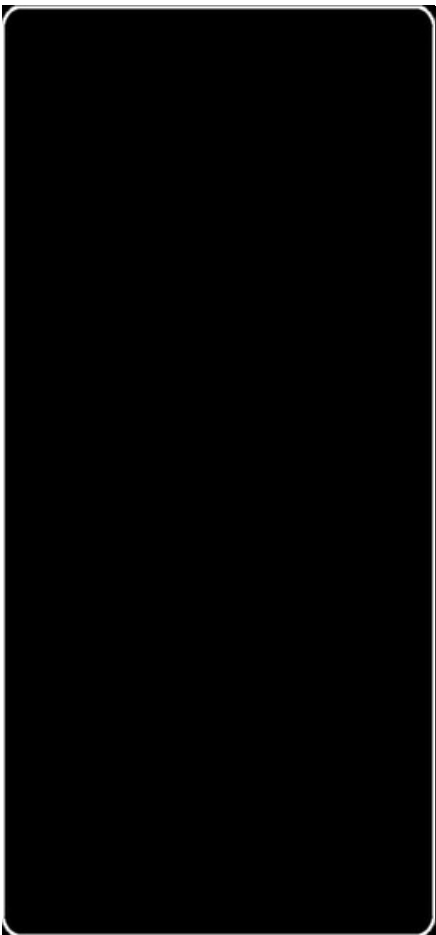


RS20287-7
Raven

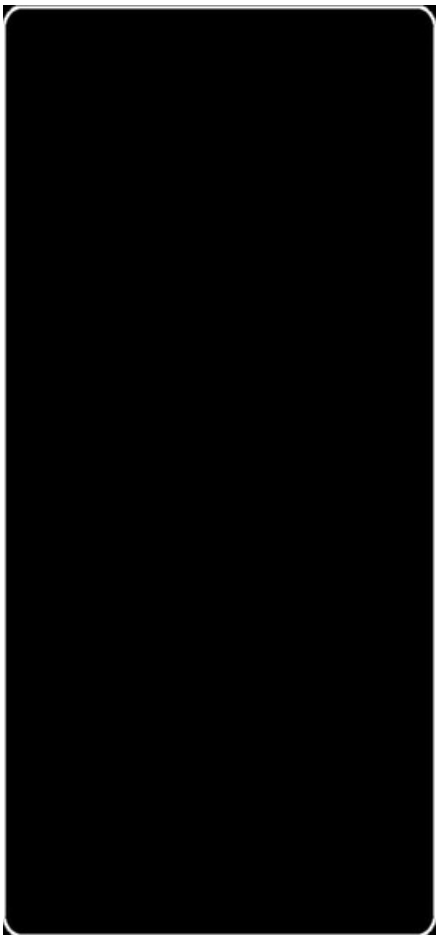

RS20287-8
Flax

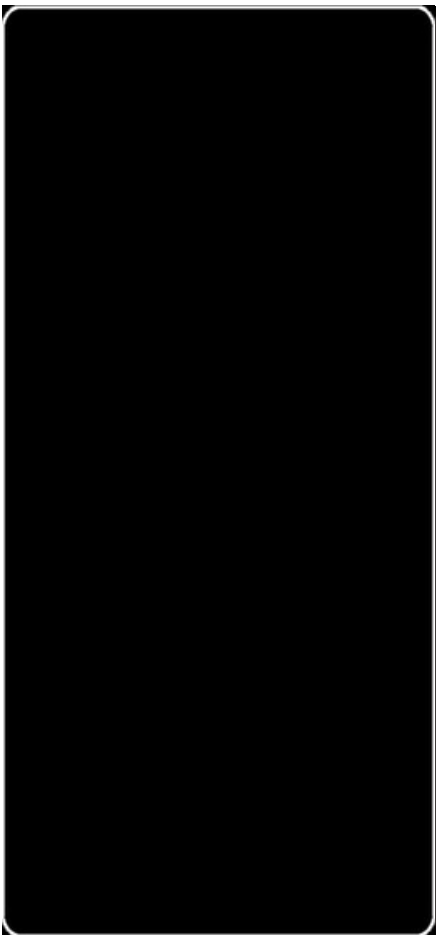

RS20287-9
Platinum

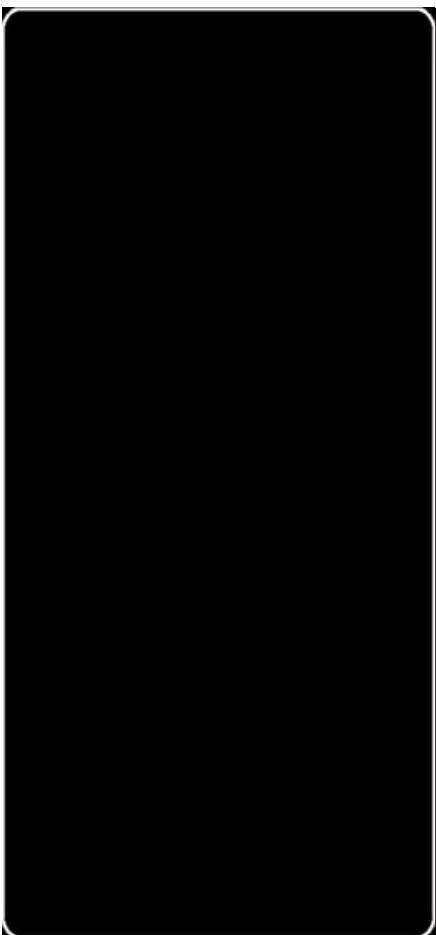

RS20287-10
Steel Gray

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²100±5%(g/m²)
3.0±5%(oz/yd²)


Repeat10cm(Solid)x7.0cm(Sheer)

Light Fastness:2.5Grade (ISO 105 802)


ZEBRA BLINDS

Bella
(Light Filtering)


Windows Skin

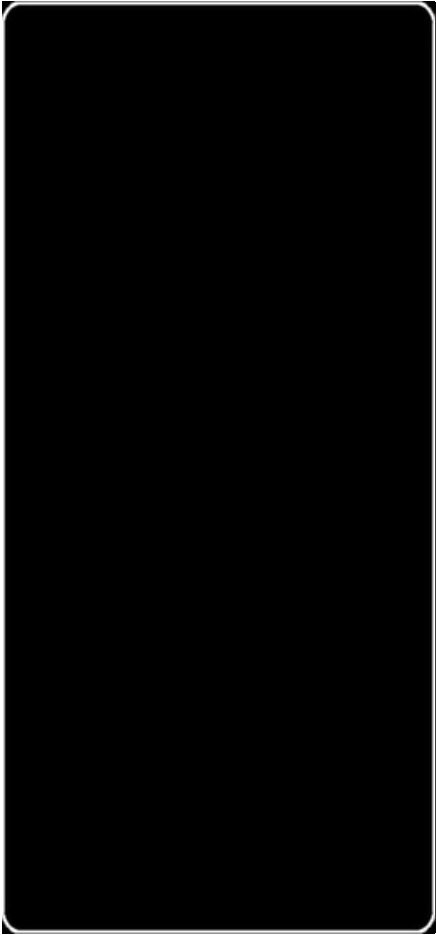


RS20287-11
Anchracite

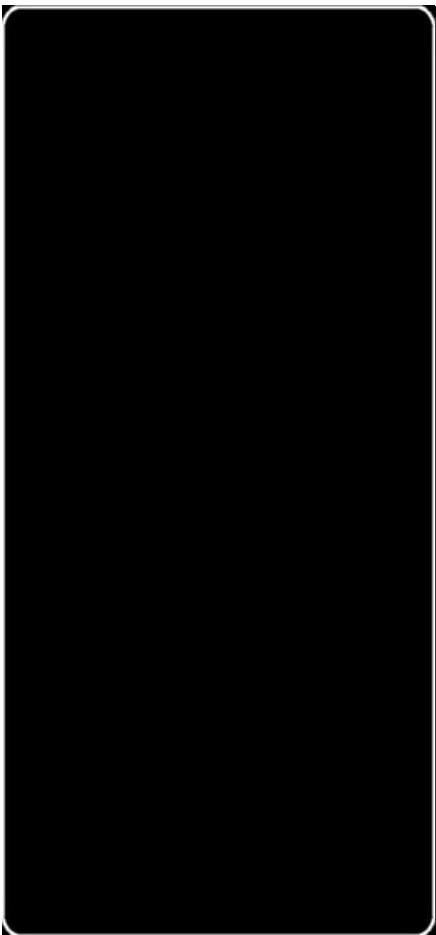


RS20287-12
Birch

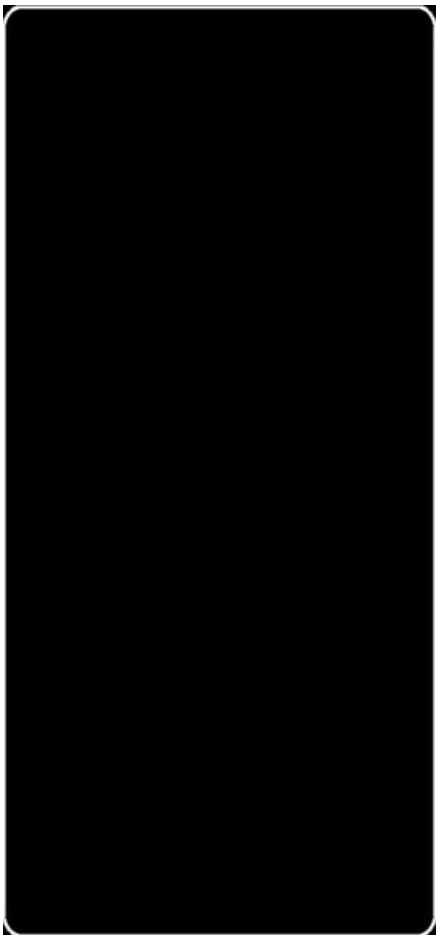

RS20287-13
Wheat

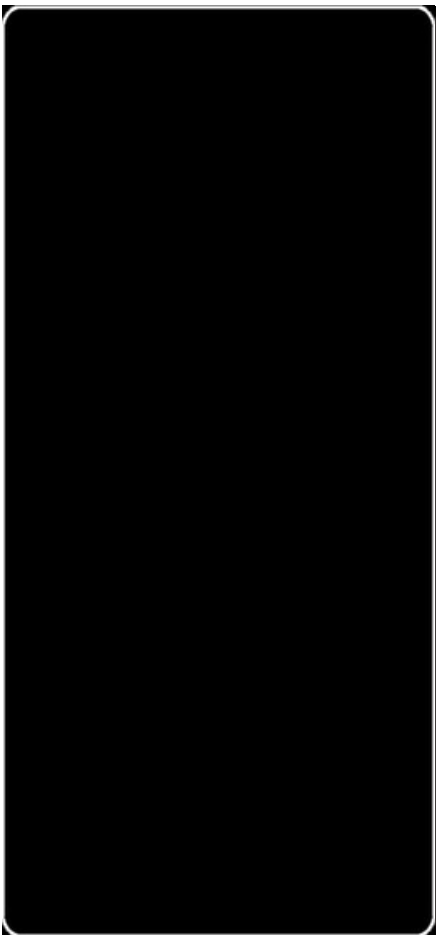

RS20287-14
Dove

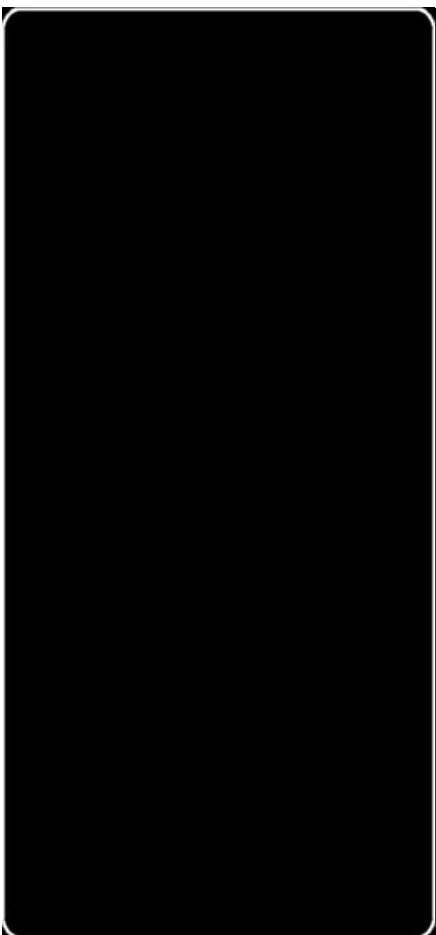

RS20287-16
Brown

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 100 ± 5% (g/m²)
3.0 ± 5% (oz/yd²)


Repeat 10 cm (Solid) x 7.0 cm (Sheer)

Light Fastness: 2.5 Grade (ISO 105 802)


ZEBRA BLINDS

Color (Light Filtering)


Windows Skin



RS20282-1
Swan



RS20282-2
Ivo



RS20282-3
Silver

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M²: 170±5% (g/m²)
5.2±5% (oz/yd²)


Repeat: 8.5cm (Solid) x 5.5cm (Sheer)

Light Fastness: 2-6 Grade (ISO 105 802)


ZEBRA BLINDS

Hila (Light Filtering)


Windows Skin

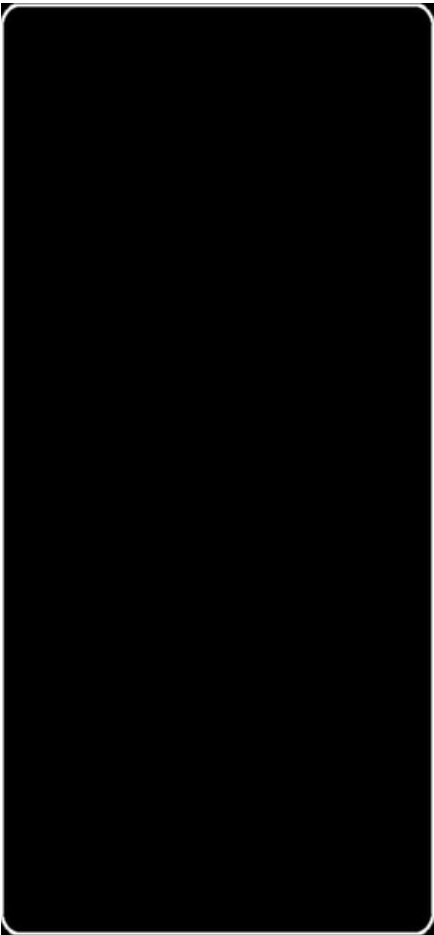


RS20281-1
Pearl

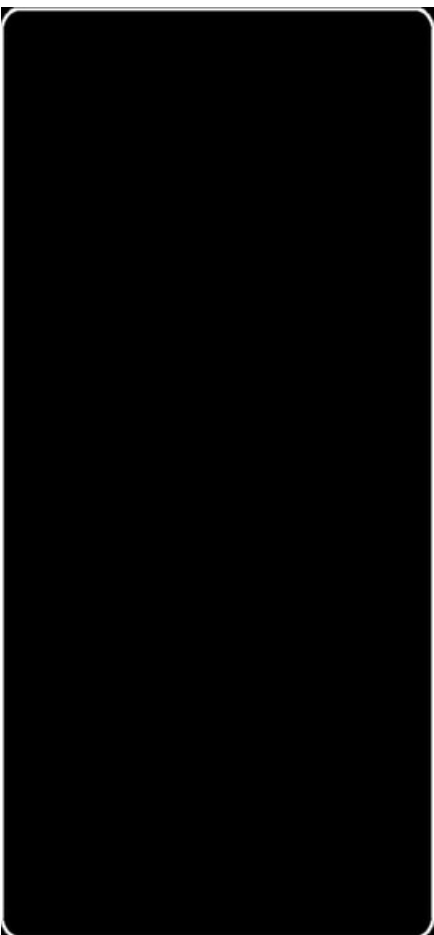


RS20281-2
Vanilla

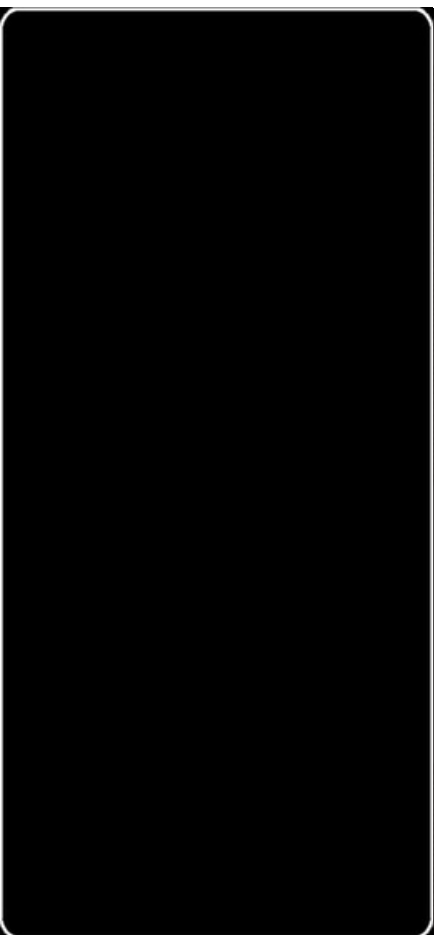


RS20281-3
Dupione latte

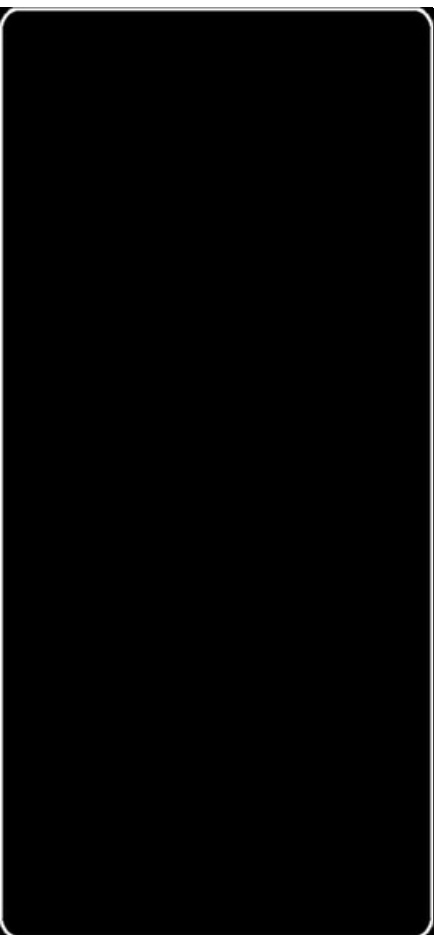

RS20281-4
Nimbus

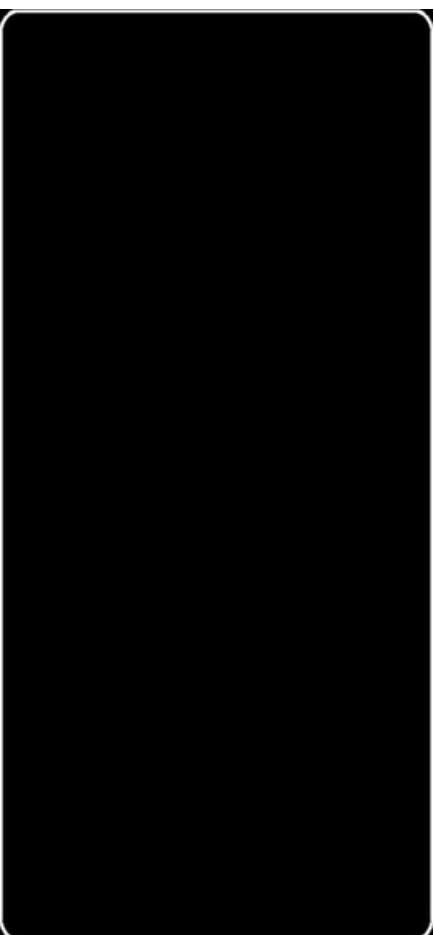

RS20281-5
Smoke

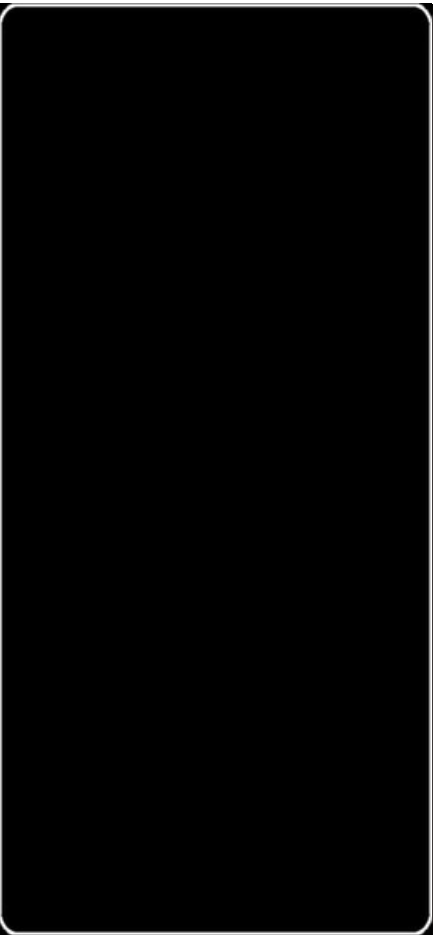

RS20281-6
Anthracite

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 130 ± 5% (g/m²)
3.8 ± 5% (oz/yd²)


Repeat 8.5 cm (Solid) x 5.5 cm (Sheer)

Light Fastness: 2-5 Grade (ISO 105 802)


ZEBRA BLINDS

Glamor (Light Filtering)


Windows Skin




RS20280-1
Chalk



RS20280-2
Eggshell



RS20280-3
Flax



RS20280-4
Platinum

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)


Repeat 8.5cm(Solid)x5.5cm(Sheer)

Light Fastness:2.5Grade (ISO 105 802)


ZEBRA BLINDS

Duscha (Light Filtering)


Windows Skin



RS2218-1
Swan



RS2218-3
Wheat



RS2218-7
Silver

Composition:Polyester35%+PVC65%

Finished Width:183/200/250/300cm
72"/79"/98"/118"

Weight M²:250±5%(g/m²)
7.4±5%(oz/yd²)


Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)


ZEBRA BLINDS

Duscha (Light Filtering)


Windows Skin



RS2219-1
Vanilla
Ice



RS2219-4
Steel Grey




RS2219-5
Black Olive

Composition:Polyester35%+PVC65%	Finished Width:183/200/250/300cm 72"/79"/98"/118"	Weight M²:250±5%(g/m²) 7.4±5%(oz/yd²)	Repeat:7.5cm(Solid)x5.0cm(Sheer)	Light Fastness:≥6Grade (ISO 105 B02)
---------------------------------	--	--	----------------------------------	--------------------------------------


ZEBRA BLINDS

Verona (Light Filtering)


Windows Skin

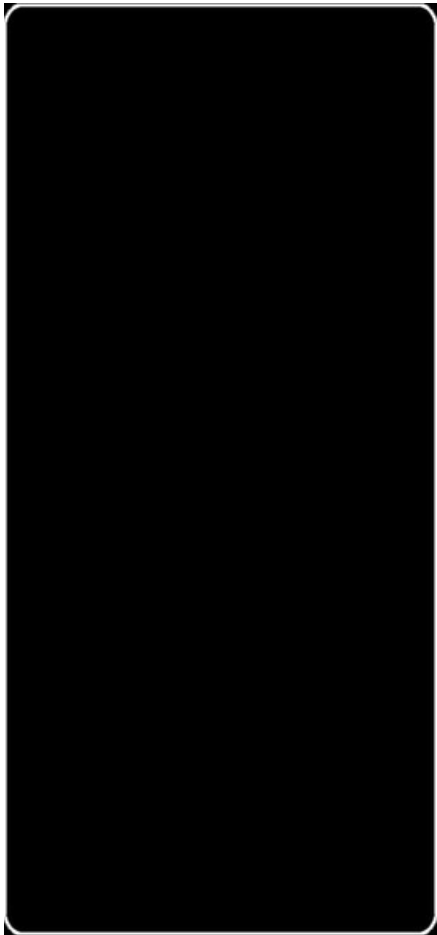


RS2255-1
Foggy

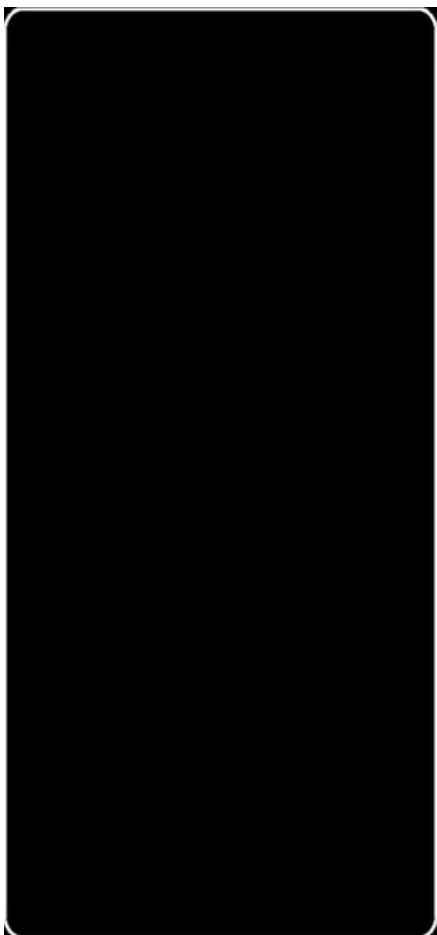


RS2255-3
Oyster

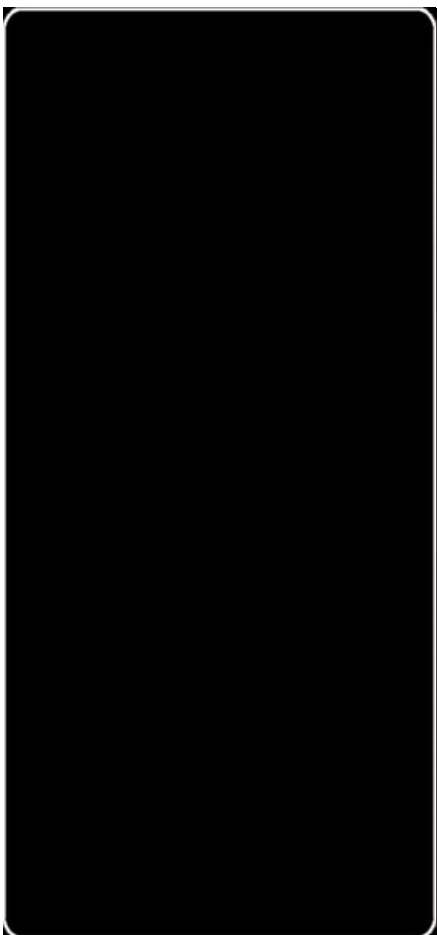


RS2255-4
Wheat

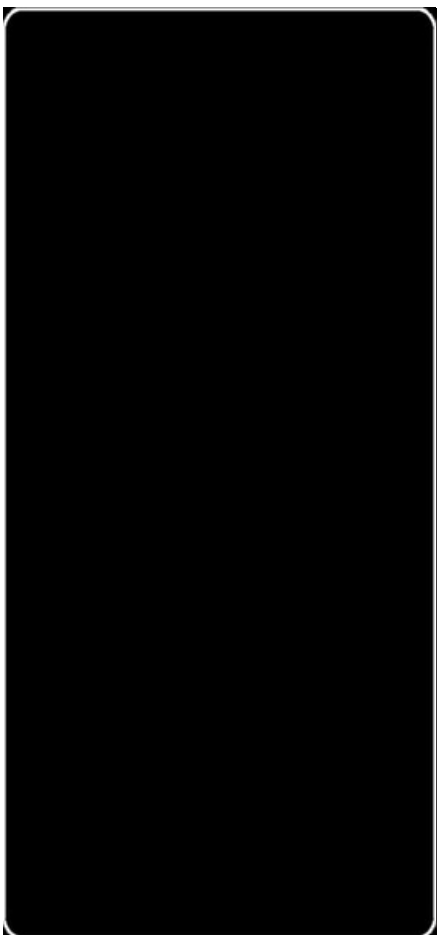

RS2255-5
Straw

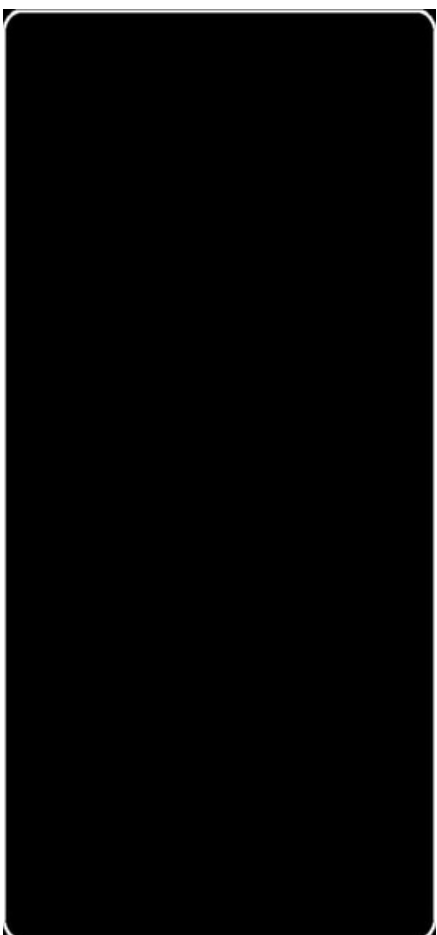

RS2255-8
Pebble

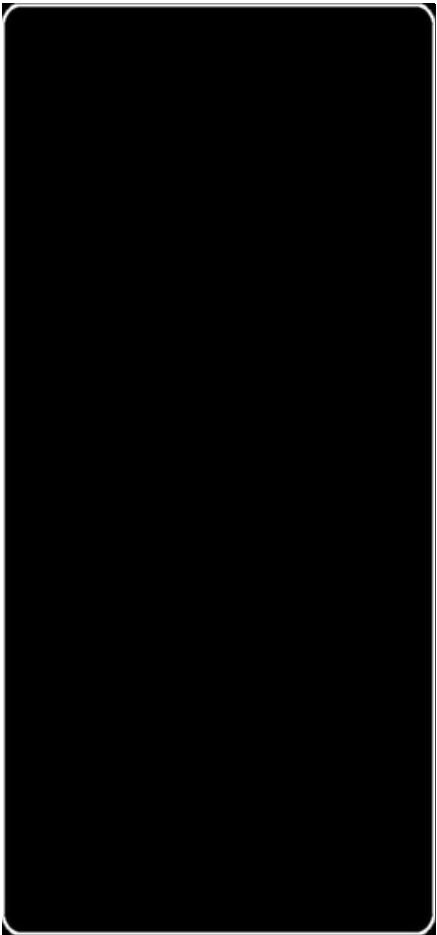

RS2255-10
Flint

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M²: 125±5%(g/m²)
3.7±5%(oz/yd²)


Repeat: 7.5cm(Solid)x5.0cm(Sheer)

Light Fastness: 2-6 Grade (ISO 105 B02)


ZEBRA BLINDS

Bredon (Light Filtering)


Windows Skin




RS2216-1
Winter White



RS2216-2
Ivo



RS2216-4
Silver



RS2216-7
Black

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M²: 90±5%(g/m²)
2.7±5%(oz/yd²)


Repeat: 7.5cm(Solid)x5.0cm(Sheer)

Light Fastness: ≥6 Grade (ISO 105 B02)


ZEBRA BLINDS

Toscana (Light Filtering)


Windows Skin



RS2235-1
Glacier



RS2235-2
Rich Cream



RS2235-3
Pebble

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 125 ± 5% (g/m²)
3.7 ± 5% (oz/yd²)


Repeat: 7.5cm (Solid) x 5.0cm (Sheer)

Light Fastness: 2.5 Grade (ISO 105 802)


ZEBRA BLINDS

Furze (Light Filtering)


Windows Skin




RS2269-1
Alabaster



RS2269-2
Flax



RS2269-3
Chestnut



RS2269-4
Anthracite


Composition: Polyester 100%


Finished Width: 300cm/118"

Weight M²: 160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat: 7.5cm(Solid)x5.0cm(Sheer)

Light Fastness: 2-6 Grade (ISO 105 B02)




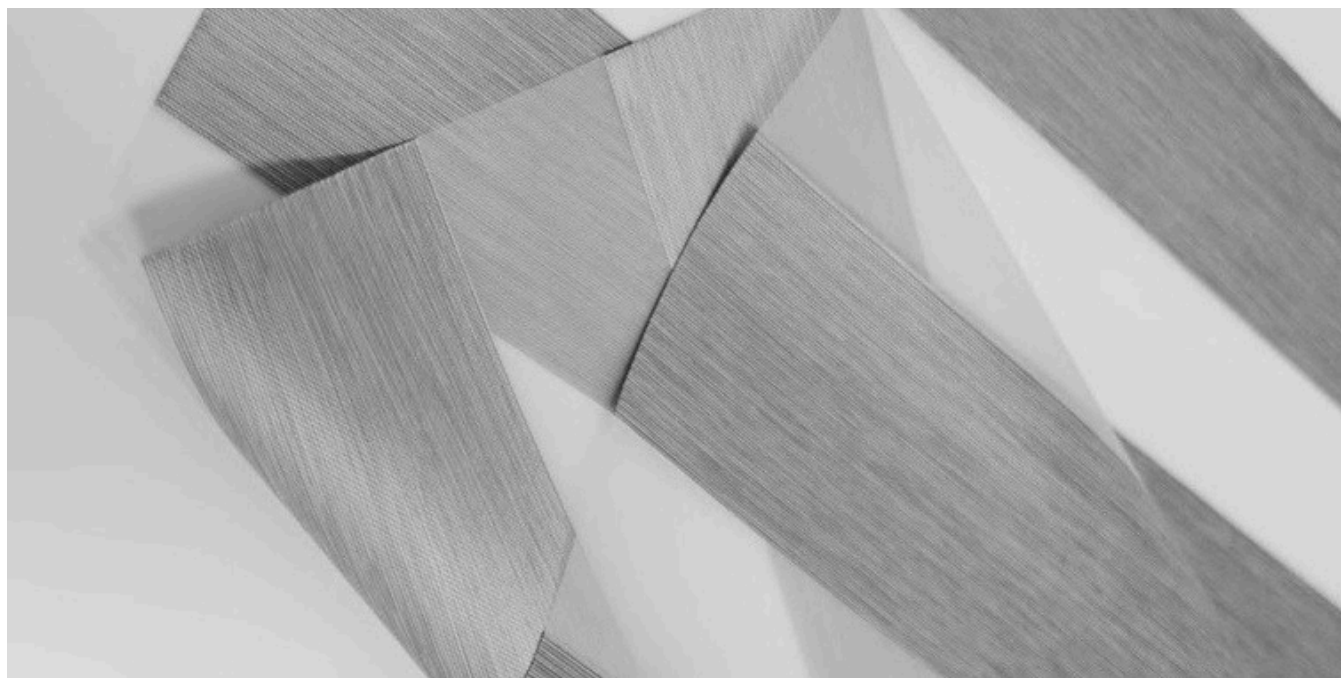


ZEBRA BLINDS

Rossoni (Blackout)


Windows Skin

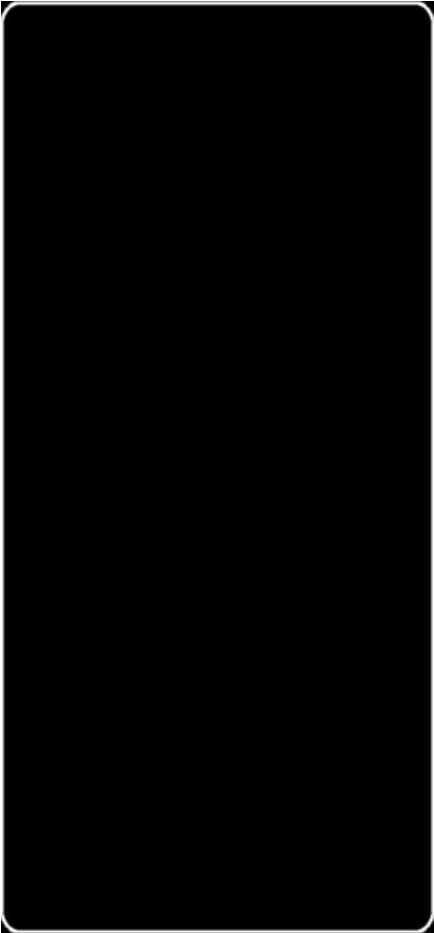


RS20288-1
Swan

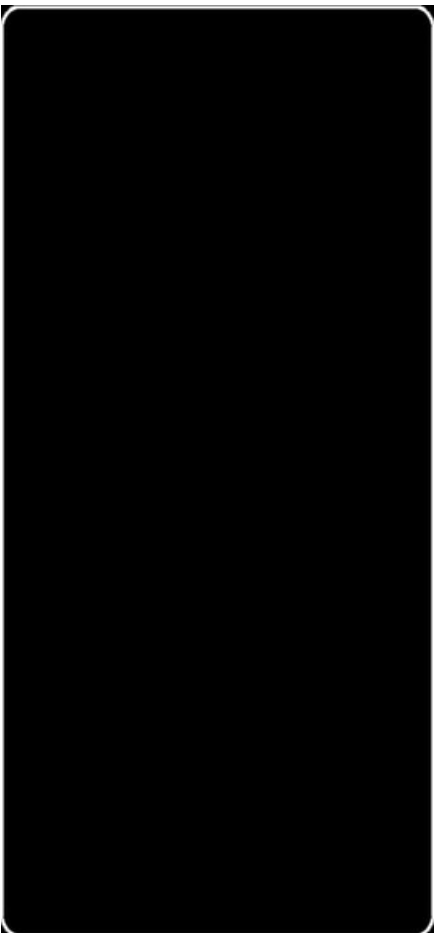


RS20288-2
Could

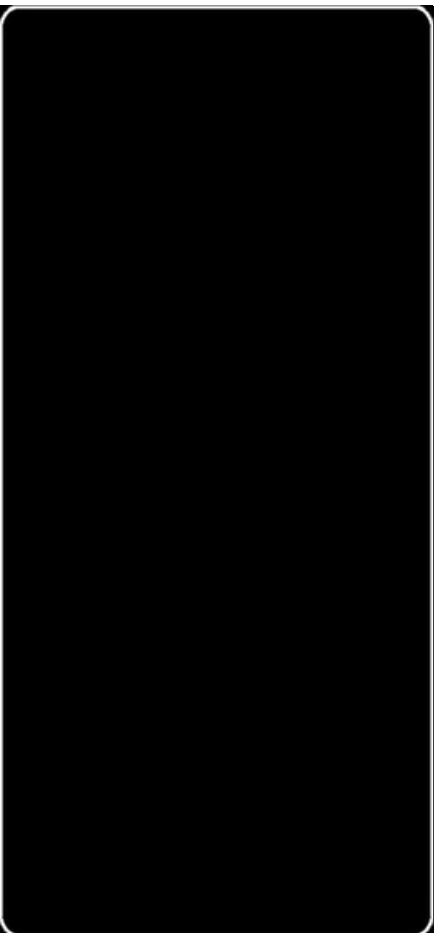


RS20288-3
Silver

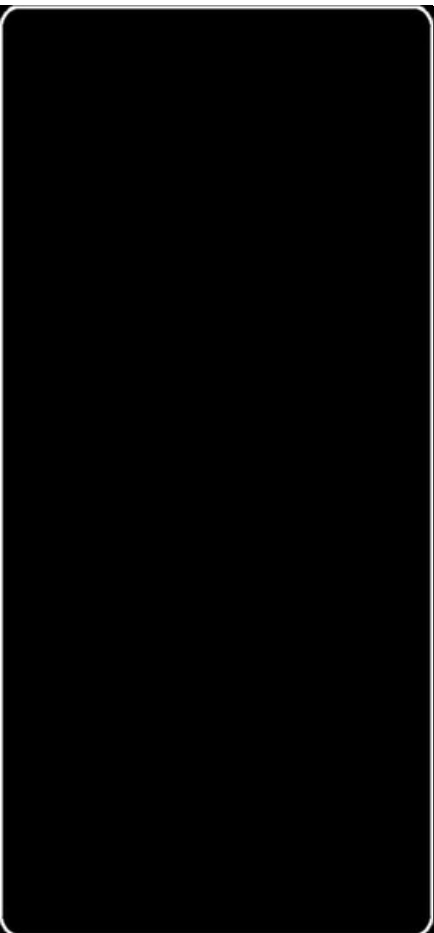

RS20288-4
Ash

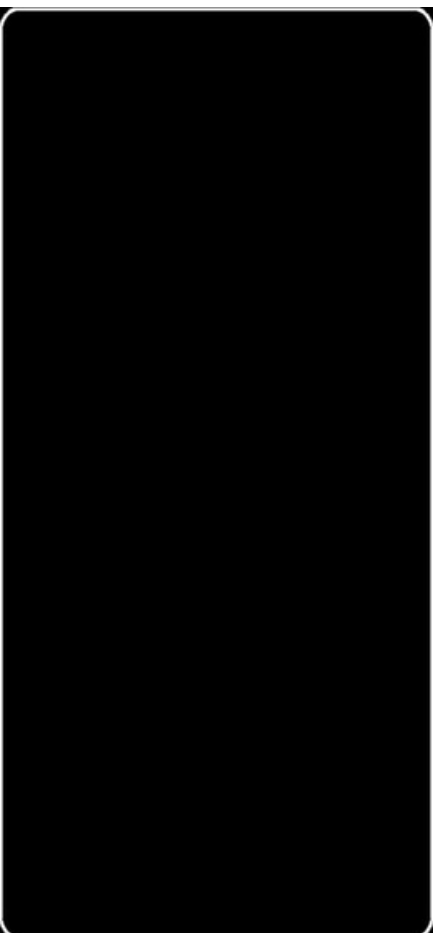

RS20288-5
Seagull

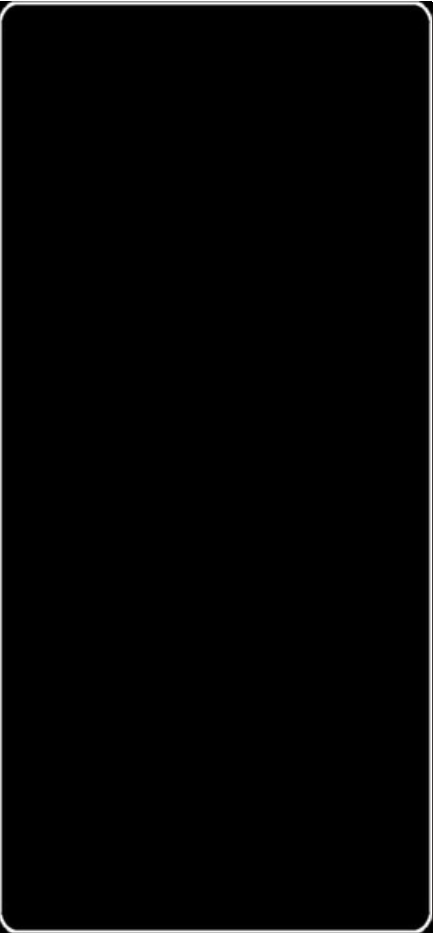

RS20288-6
Platinum

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 220 ±5%(g/m²)
6.5 ±5%(oz/yd²)


Repeat 10.0 cm(Solid) x 7.0 cm(Sheer)

Light Fastness: 2-5 Grade (ISO 105 B02)


ZEBRA BLINDS

Rossoni (Blackout)


Windows Skin

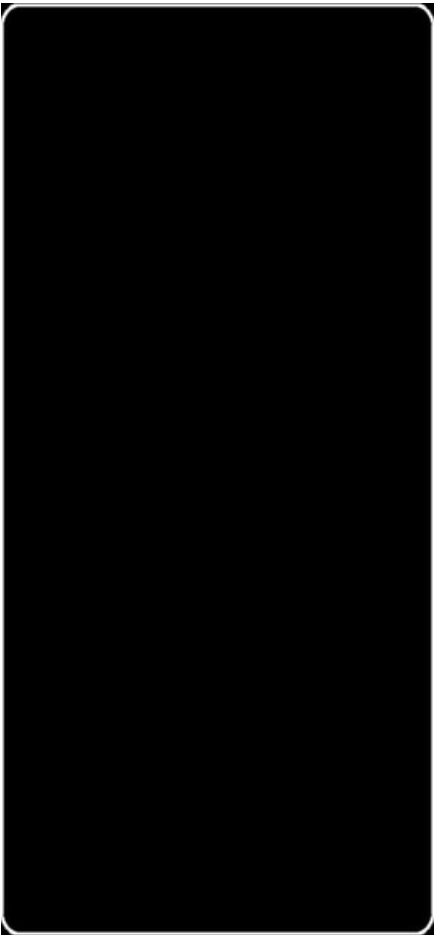


RS20288-7
Steel Gray

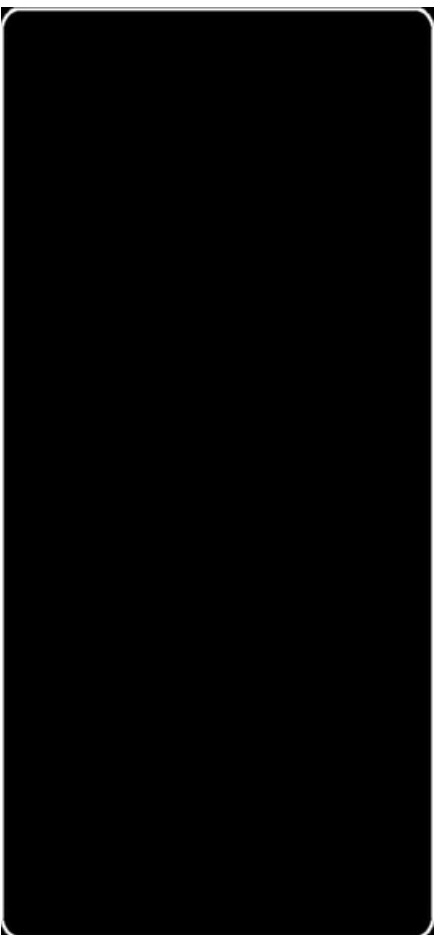


RS20288-8
Anchracite

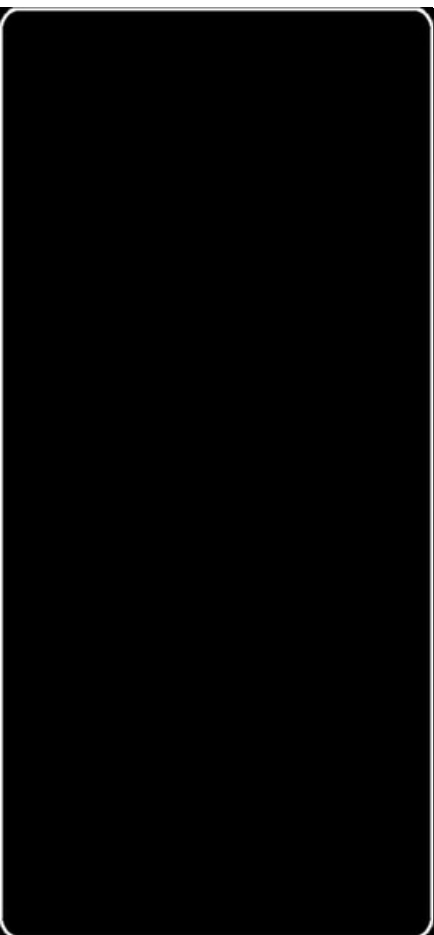


RS20288-9
Birch

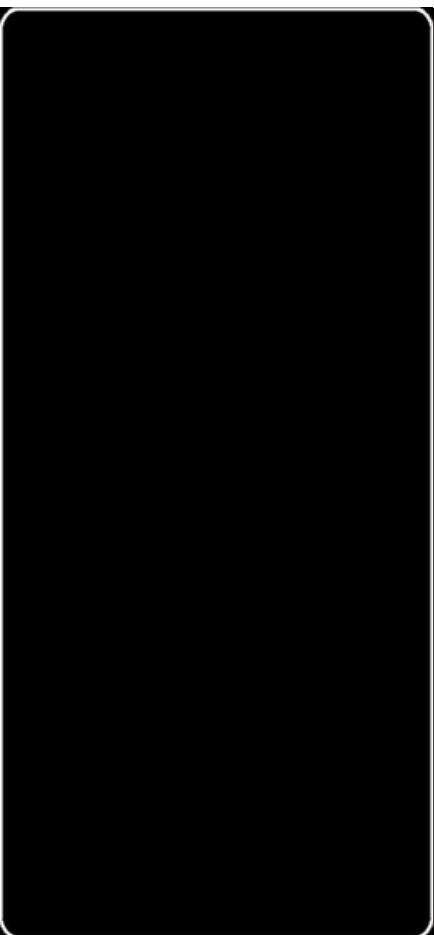

RS20288-10
Wheat

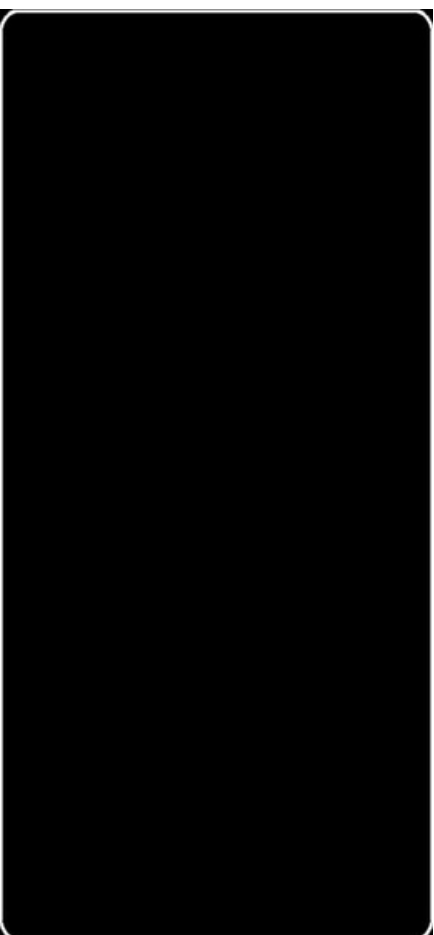

RS20288-11
Dove

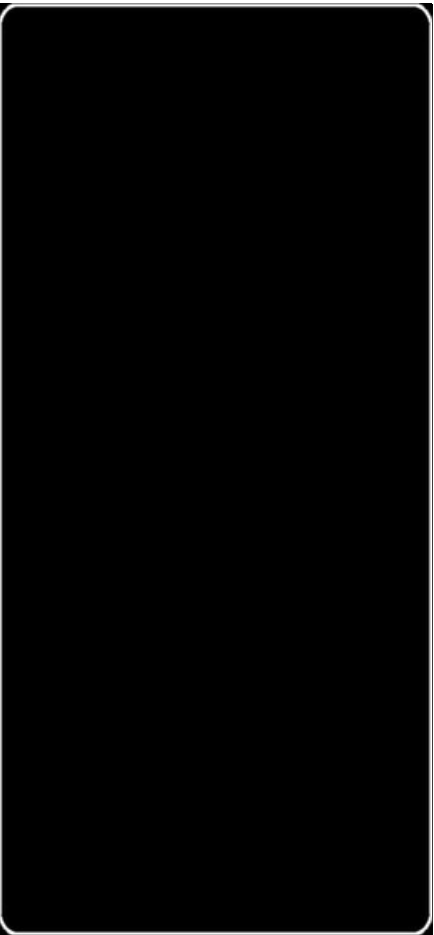

RS20288-13
Brown

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 220 ± 5% (g/m²)
6.5 ± 5% (oz/yd²)

Repeat 10.0 cm (Solid) x 7.0 cm (Sheer)


Light Fastness: 2-5 Grade (ISO 105 802)

ZEBRA BLINDS




Emilia(Blackout)


Windows Skin



FRS2157B-1
Silver



FRS2157B-4
Platinum



FRS2157B-5
Bronze

Composition:Polyester100%

Finished Width:300cm/118"

Weight M² 210 ±5%(g/m²)
6.2 ±5%(oz/yd²)

Repeat: 7.5 cm(Solid)x5.0cm(Sheer)


Light Fastness:2.5Grade (ISO 105 802)

ZEBRA BLINDS




Chelsea(Blackout)


Windows Skin



FRS2020B-4
Smoke



FRS2020B-5
Ash



FRS2020B-6
Ra a

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat:0.5cm(Solid)x5.5cm(Sheer)


Light Fastness:2.5Grade (ISO 105 802)

ZEBRA BLINDS




Shimmer (Blackout)


Windows Skin



FRS20113B-1
Mist Grey



FRS20113B-2
Dese



FRS20113B-7
Nimbus

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 165 ± 5% (g/m²)
4.9 ± 5% (oz/yd²)


Repeat 7.7 cm (Solid) x 5.2 cm (Sheer)

Light Fastness: 2.5 Grade (ISO 105 802)


ZEBRA BLINDS

Riviera (Blackout)


Windows Skin

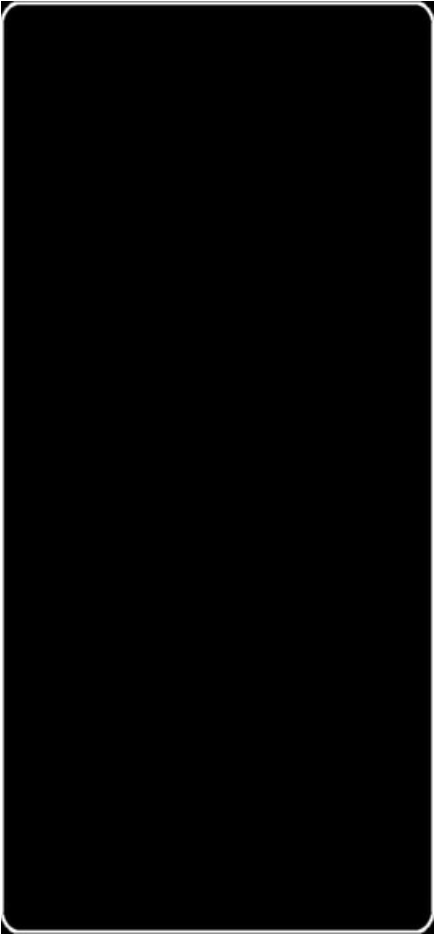


RS2242B-1
Dove

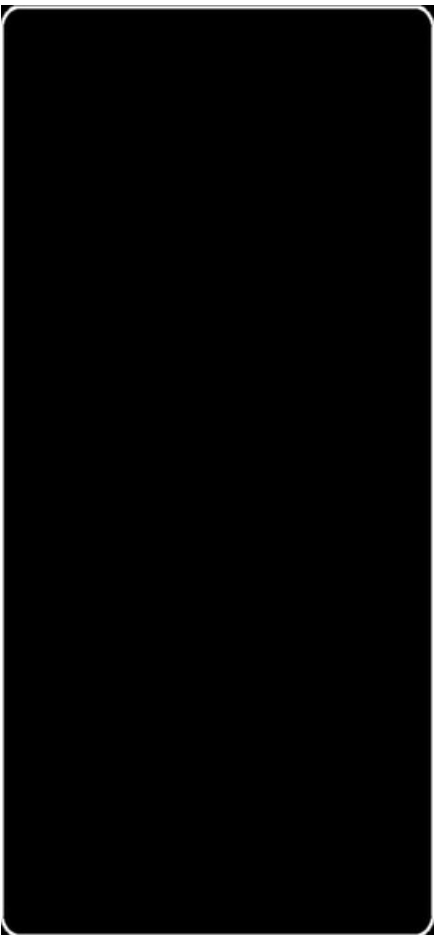


RS2242B-3
Wheat

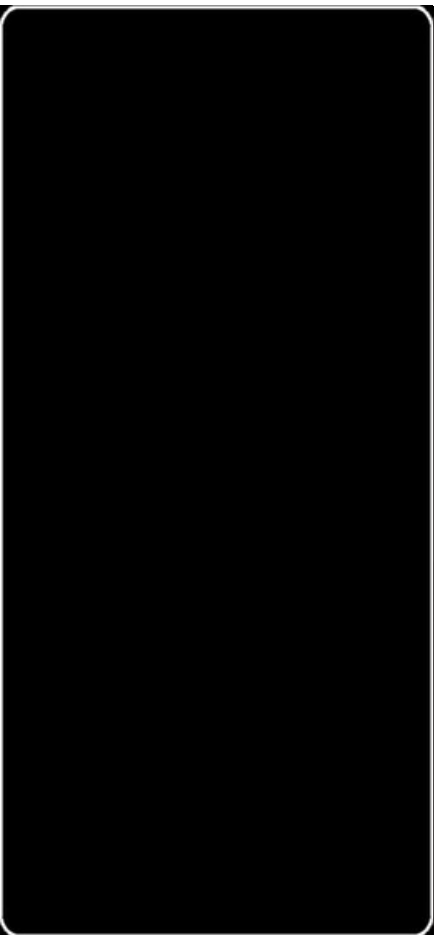


RS2242B-9
Platinum

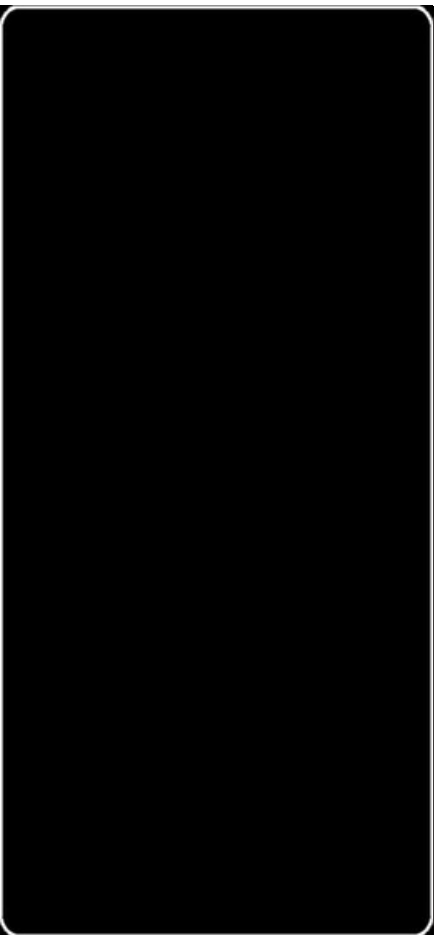

RS2242B-10
Frost Gray

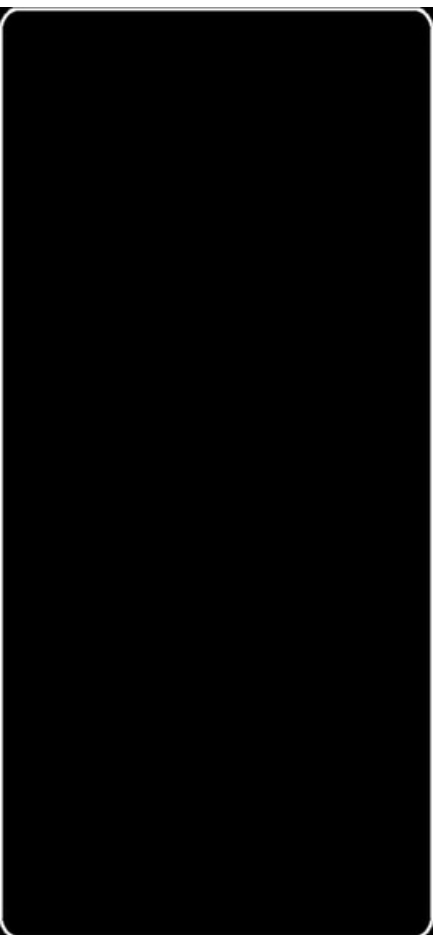

RS2242B-12
Smoke

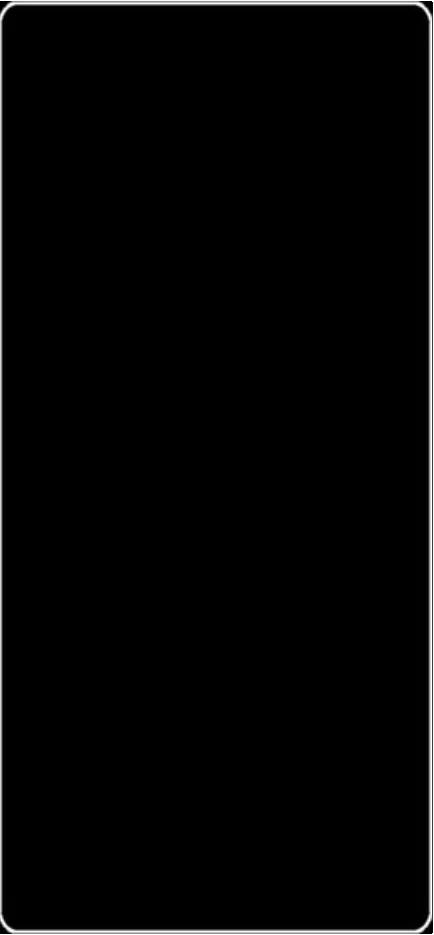

RS2242B-15
Sisal

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 170 ±5% (g/m²)
5.0 ±5% (oz/yd²)


Repeat 10.0 cm (Solid) x 7.0 cm (Sheer)

Light Fastness: 2.5 Grade (ISO 105 802)


ZEBRA BLINDS

Bahamas (Blackout)


Windows Skin

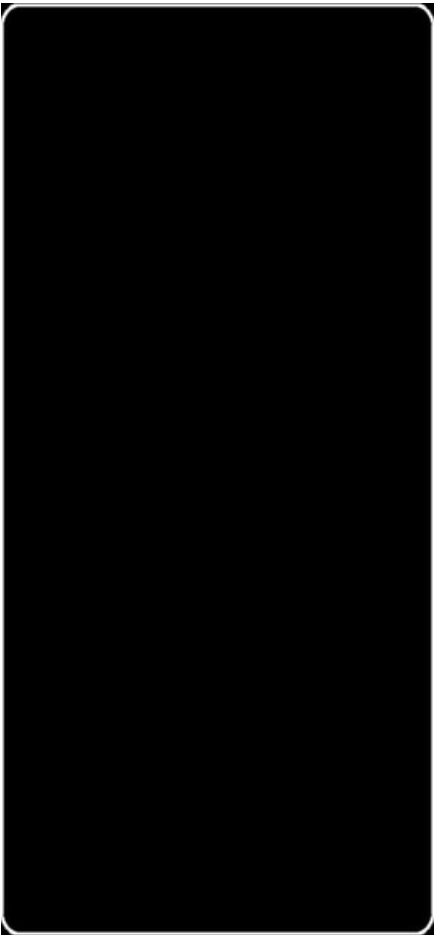


RS2241B-1
Swan

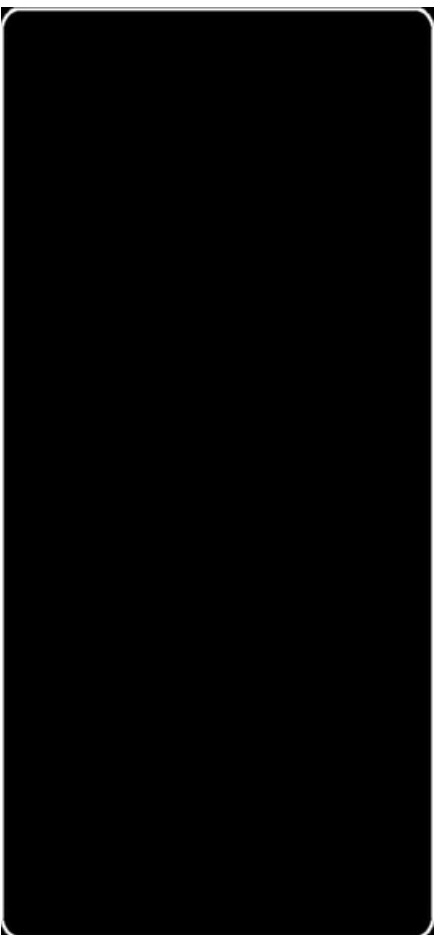


RS2241B-2
Cloud

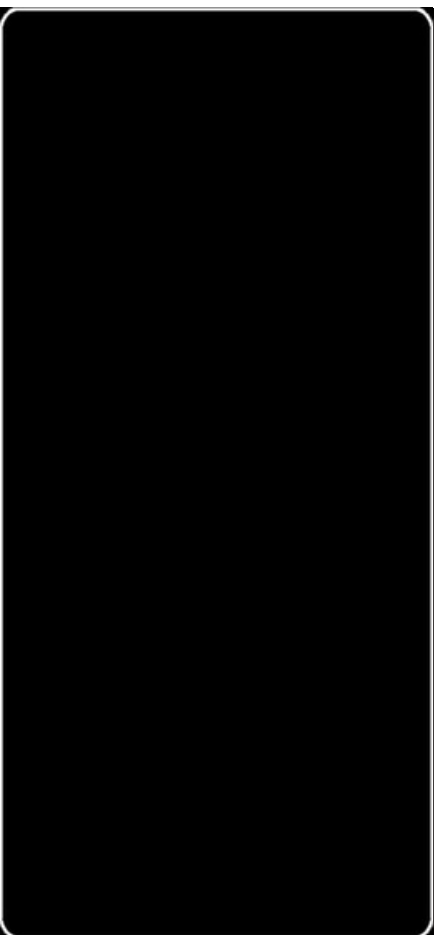


RS2241B-5
Silver

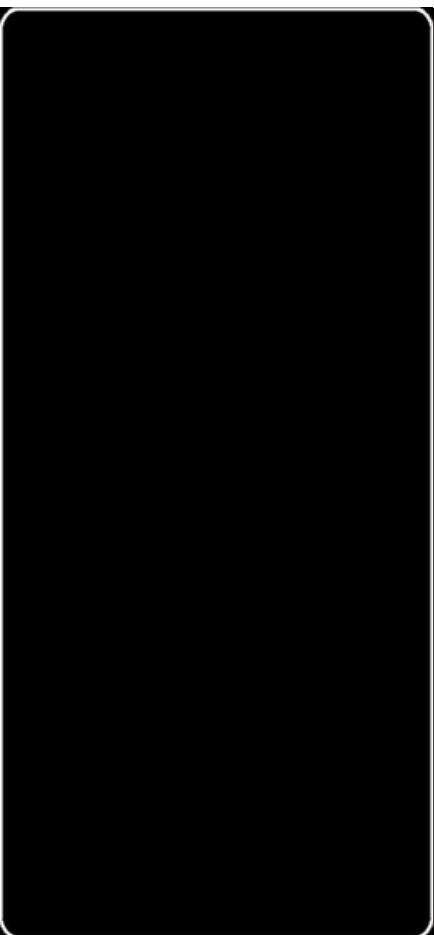

RS2241-6
Smoke

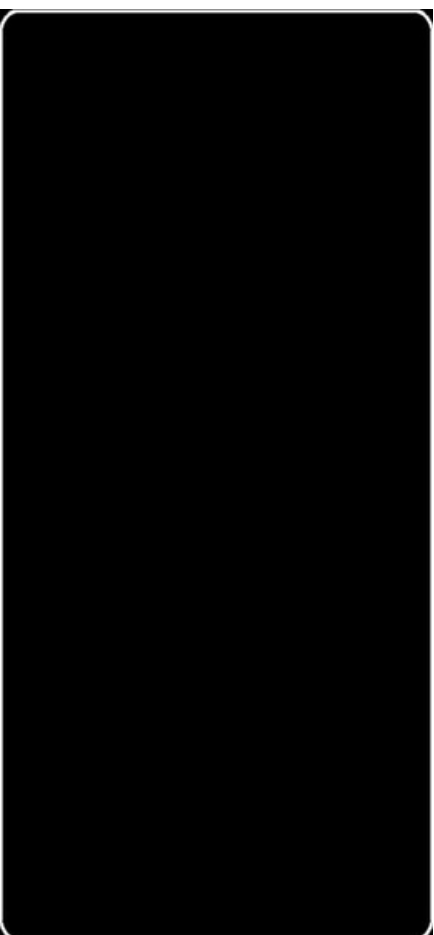

RS2241B-7
Almond

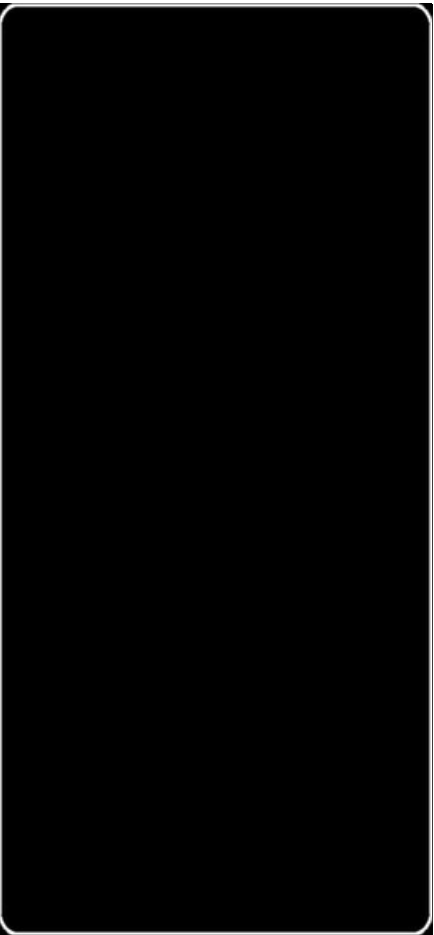

RS2241B-11
Raven

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 190 ±5%(g/m²)
5.6 ±5%(oz/yd²)


Repeat 10.0 cm(Solid) x 7.0 cm(Sheer)

Light Fastness: 2.5 Grade (ISO 105 B02)


ZEBRA BLINDS

Hollow (Light Filtering)


Windows Skin

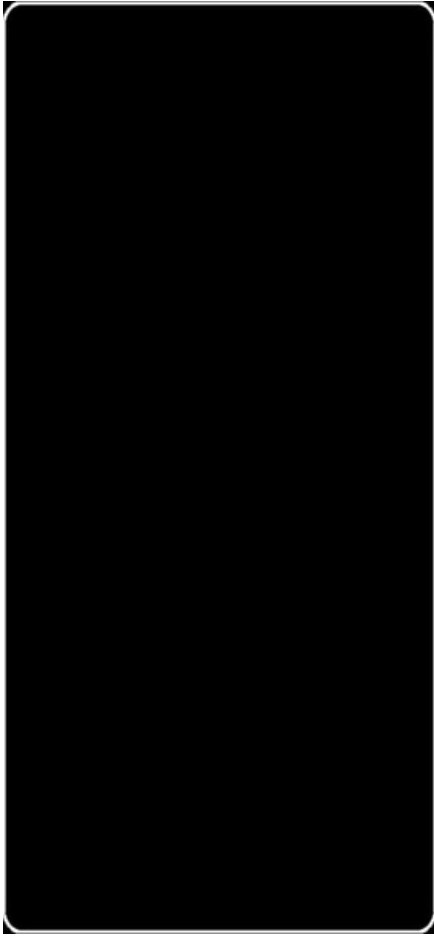


RS20212-1
Chalk

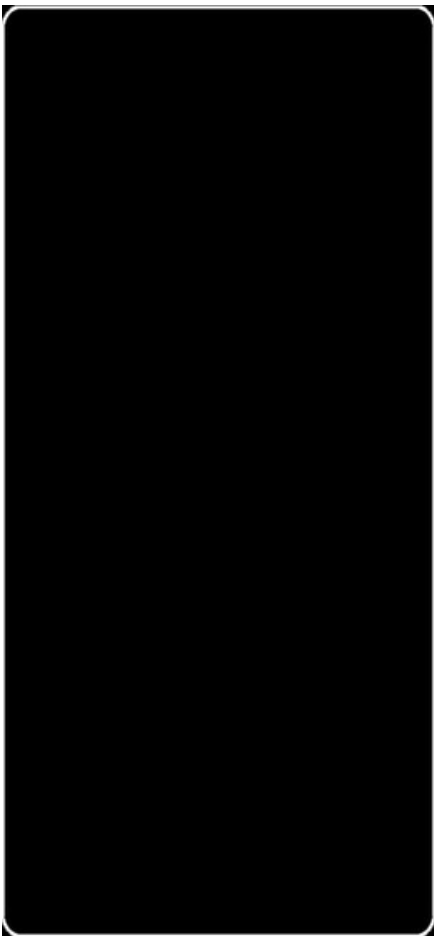


RS20212-2
Linen

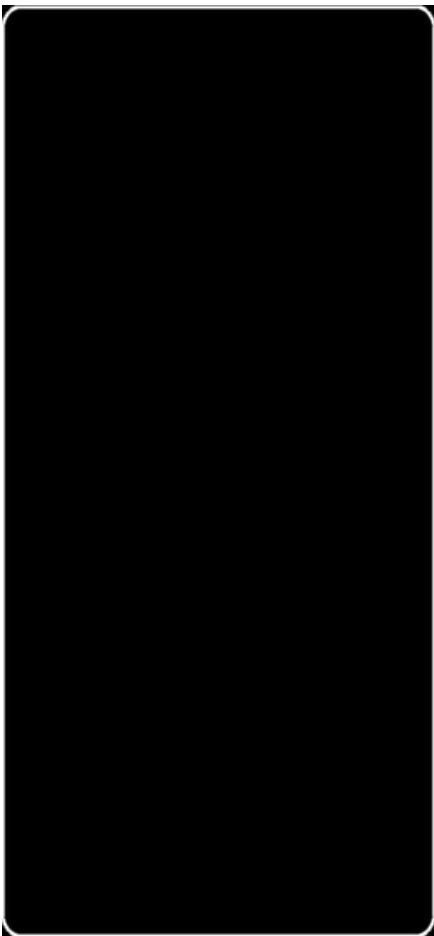


RS20212-3
Ocean

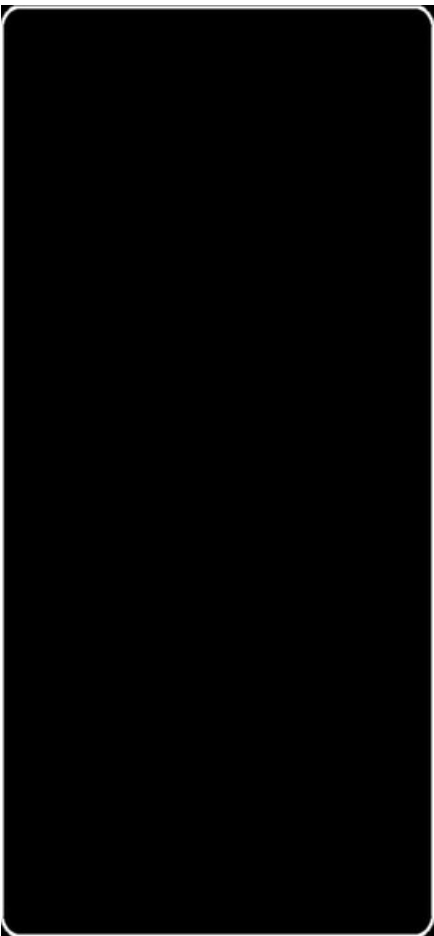

RS20212-4
Silver

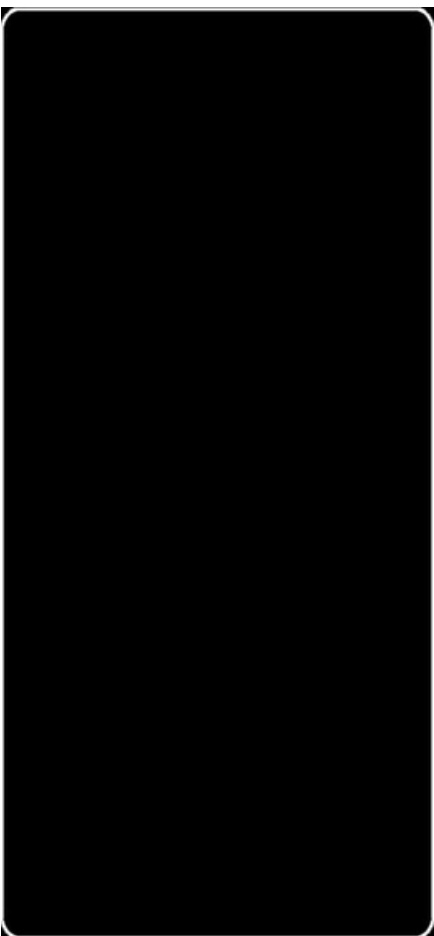

RS20212-5
Ash

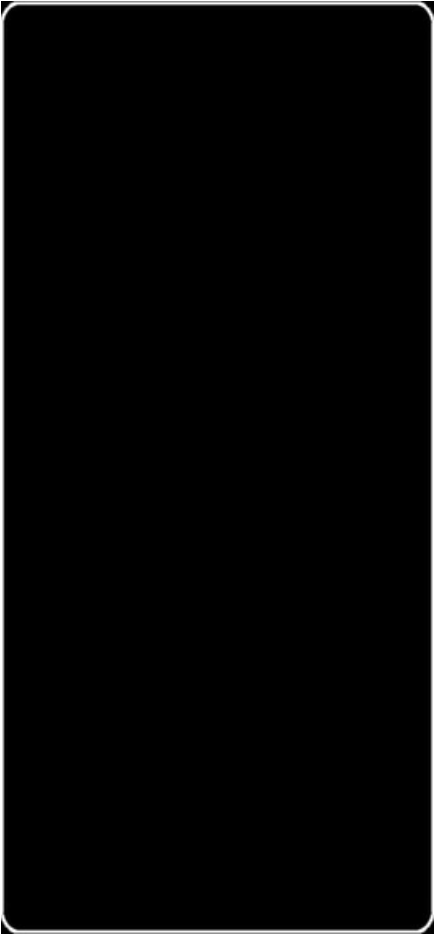

RS20212-6
Raven


Composition:Polyester100%



Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat 9.0 cm(Solid)×6.0 cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)



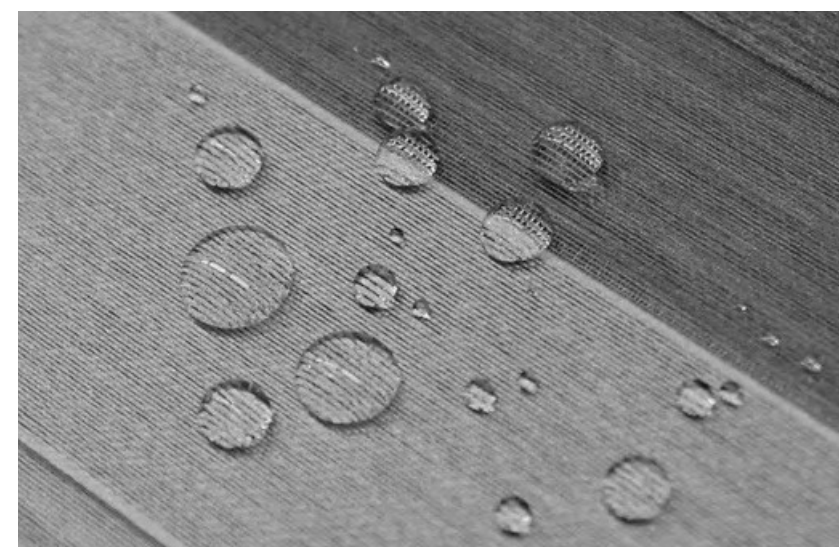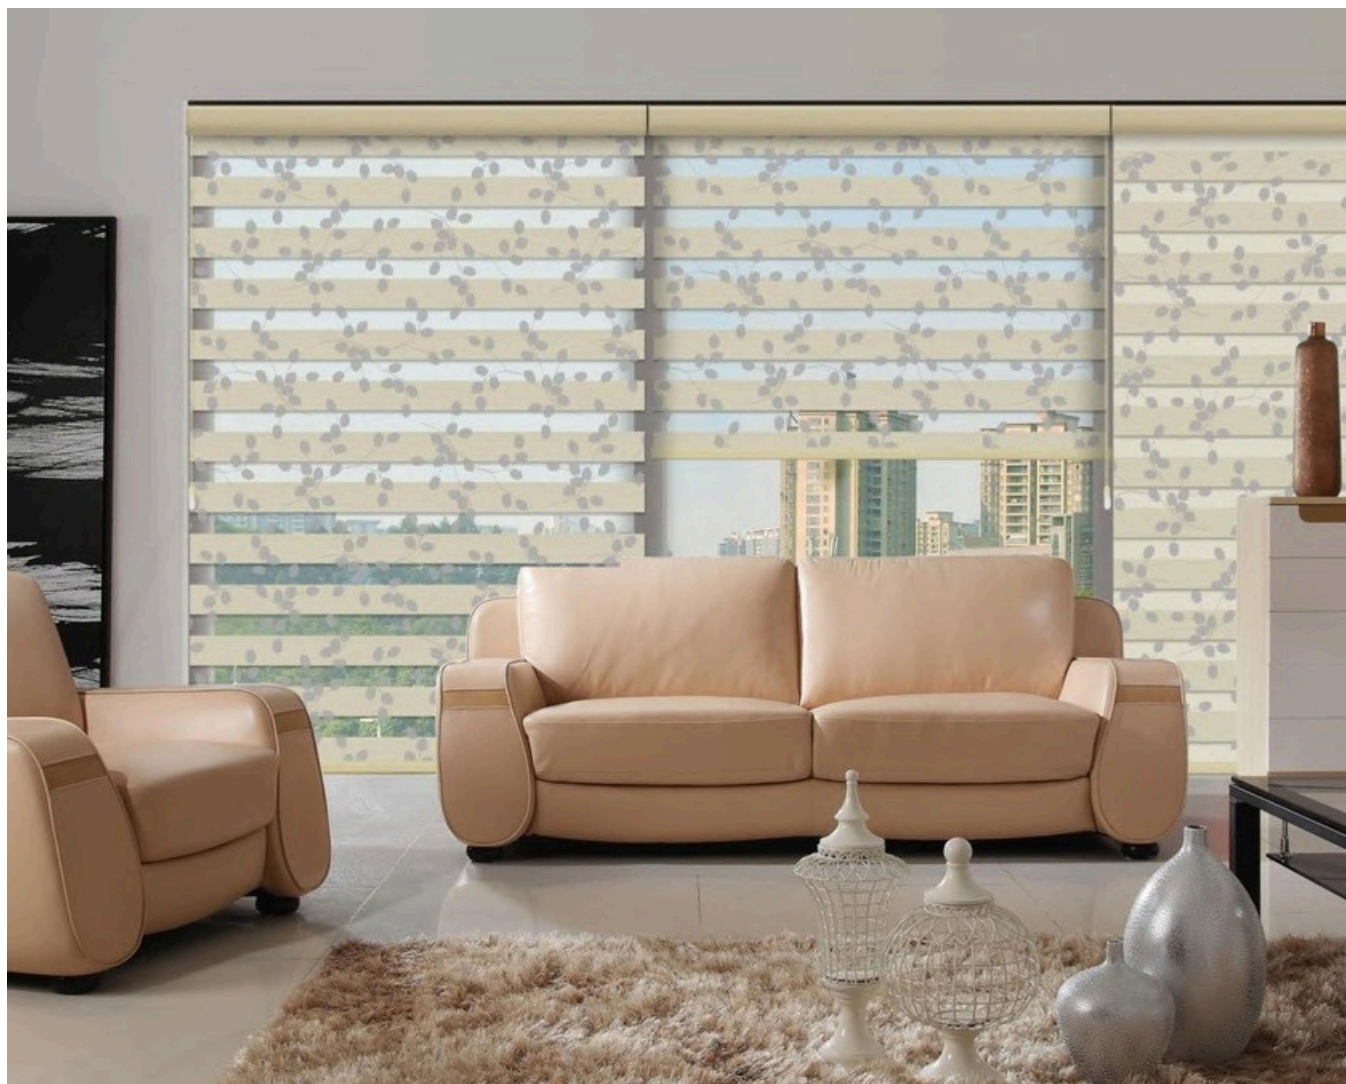

ZEBRA BLINDS



Polo no (Light Filtering)

Windows Skin



FRS2152-1
Linen



FRS2152-2
Wheat

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat7.5cm(Solid)×5.0cm(Sheer)

Light Fastness:2.5Grade (ISO 105 802)

ZEBRA BLINDS



Polo no (Light Filtering)

Windows Skin



FRS2155-1
Nougat



FRS2152-2
Chestnut

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat7.5cm(Solid)×5.0cm(Sheer)


Light Fastness:2.5Grade (ISO 105 802)

ZEBRA BLINDS




Chameleon (Blackout)


Windows Skin



FRS1021B-1
Flax



FRS1021B-3
Linen Straw



FRS1021B-4
Stella Silver

Composition: Polyester 100%

Finished Width: 300cm/118"

Weight M² 160 ± 5% (g/m²)
4.7 ± 5% (oz/yd²)

Repeat 9.7cm (Solid) x 7.0cm (Sheer)


Light Fastness: 2.5 Grade (ISO 105 802)

ZEBRA BLINDS




Valerie (Light Filtering)


Windows Skin

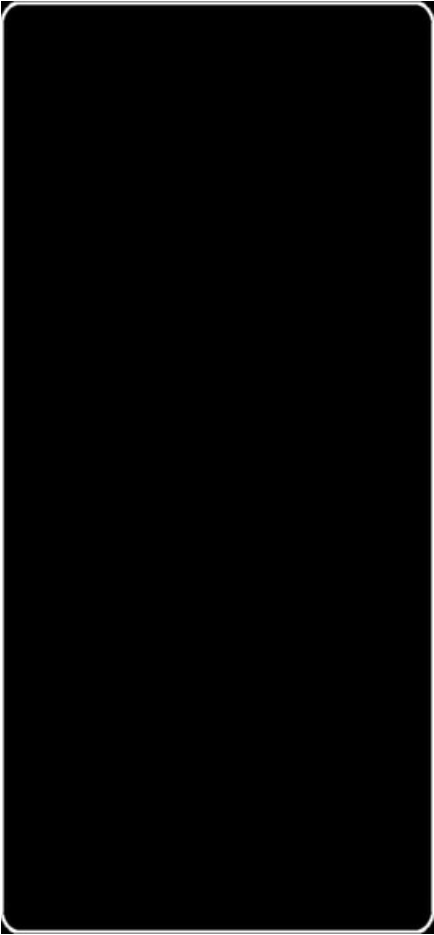


FRS1008-1
Wheat

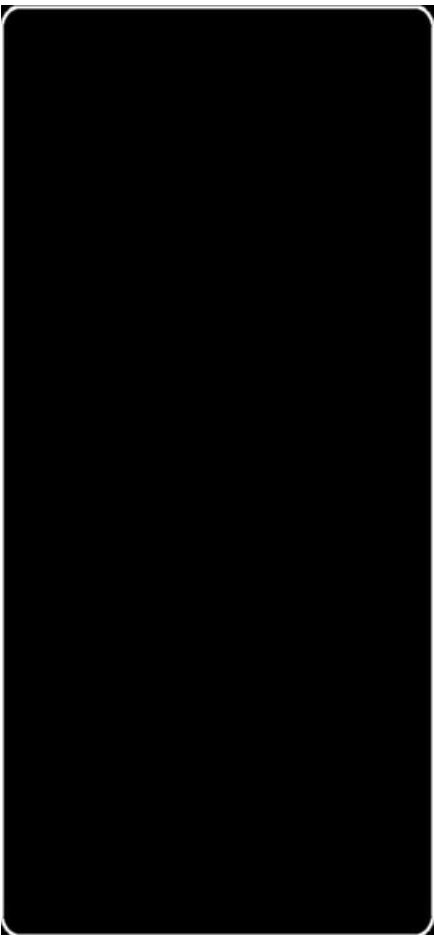


FRS1008-3
Flax

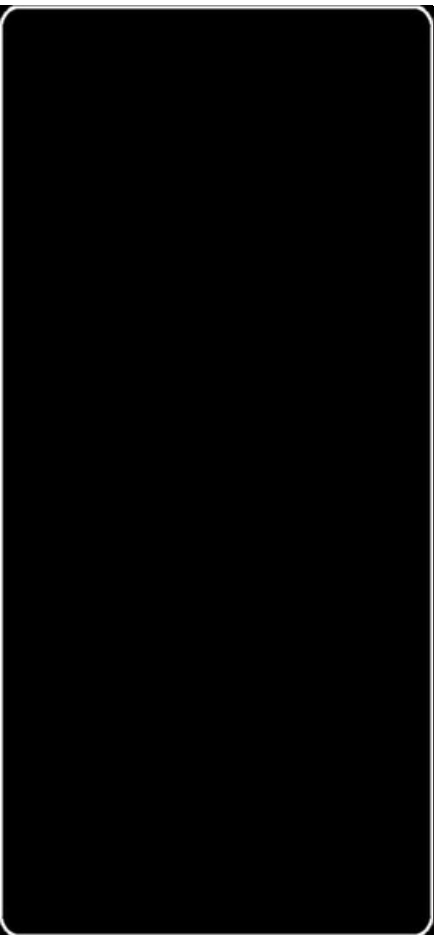


FRS1008-7
Glacier

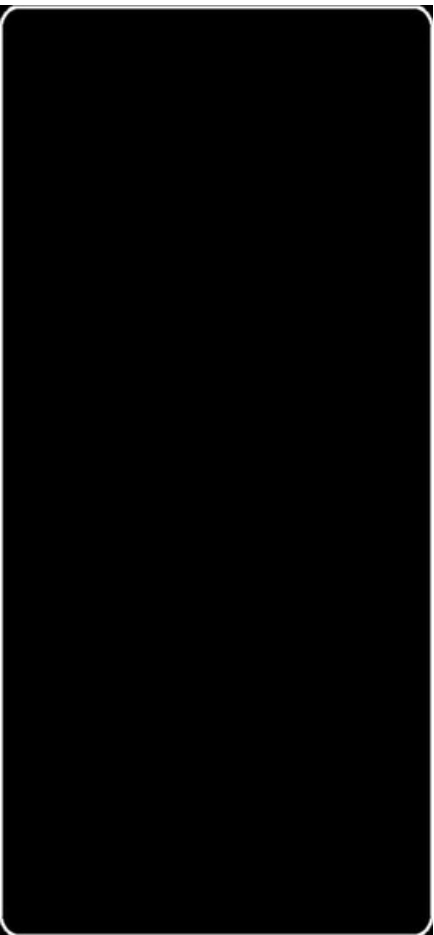

FRS1008-8
Foggy

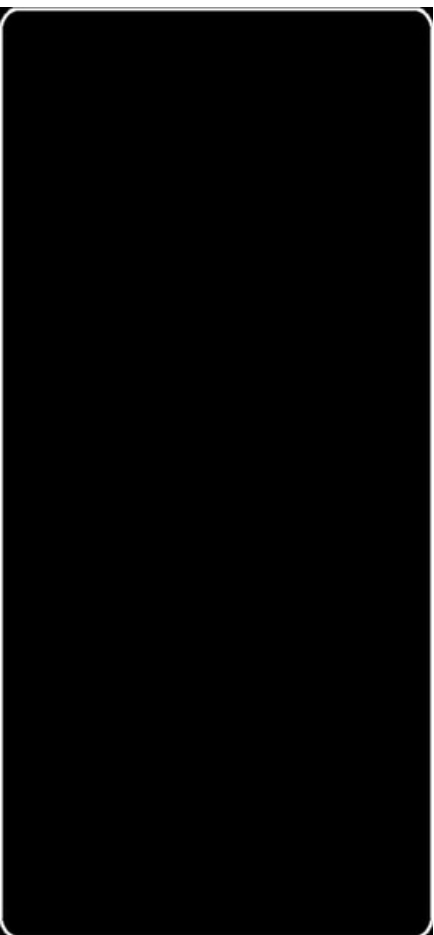

FRS1008-10
Silver

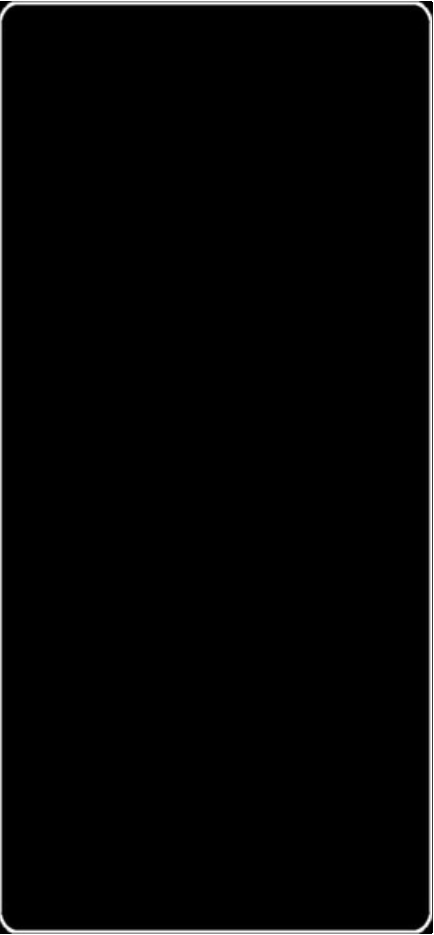

FRS1008-19
Anthracite

Composition: Polyester 100%

Finished Width: 300cm/118"


Weight M² 115 ± 5% (g/m²)
3.4 ± 5% (oz/yd²)

Repeat 7.5 cm (Solid) x 5.0 cm (Sheer)

Light Fastness: 2-5 Grade (ISO 105 B02)




ROLLER & SOLAR SHADES

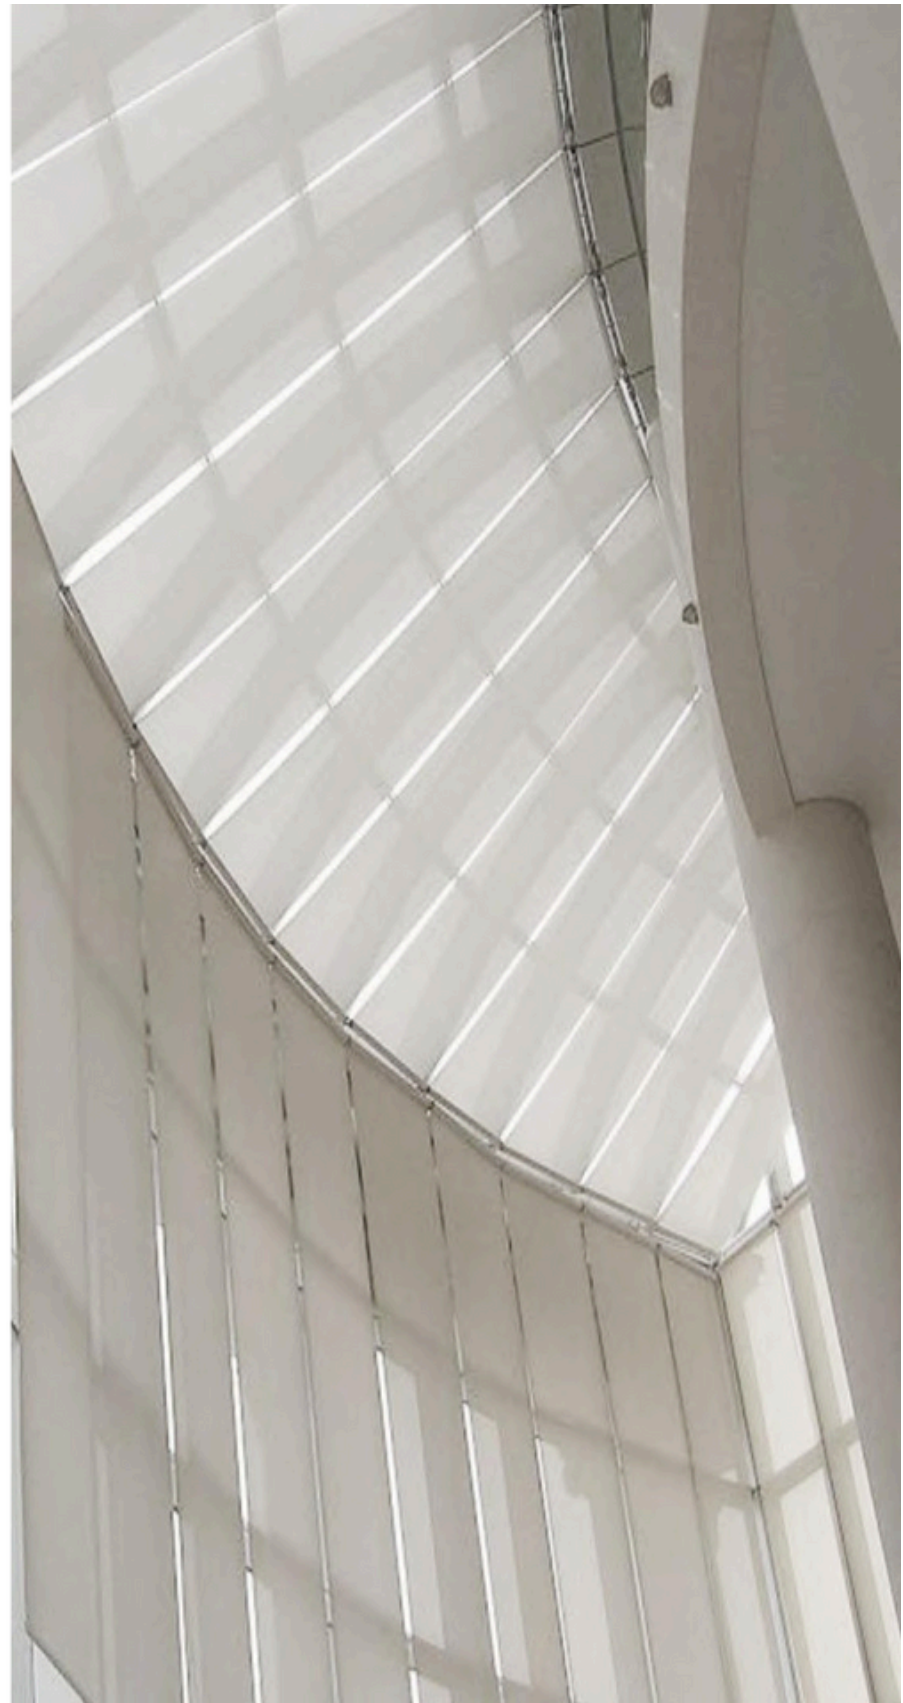

Solview


S1001

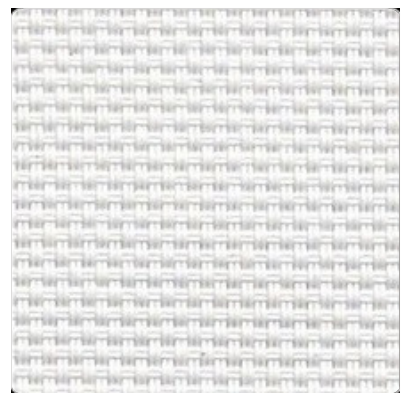


S1001-01
Ice White



S1001-03
Sandstone

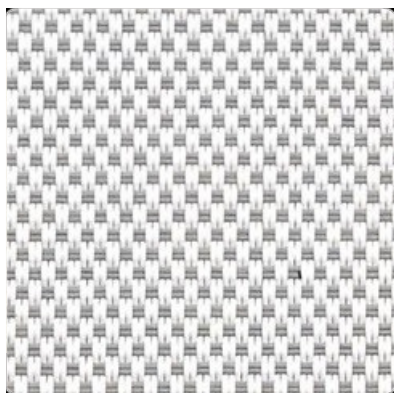


S1001-04
Platinum

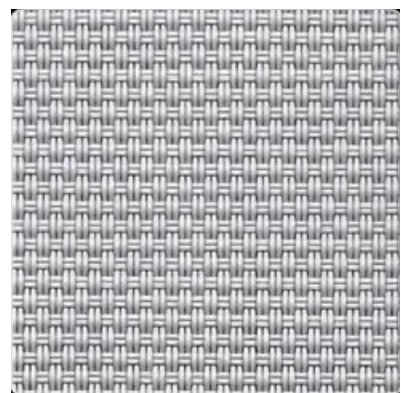


S1001-06
Grey



S1001-07
Mocha

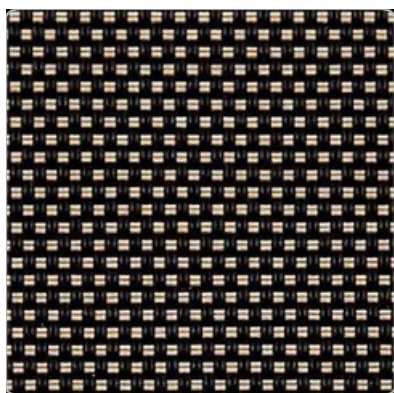

S1001-09
To ee

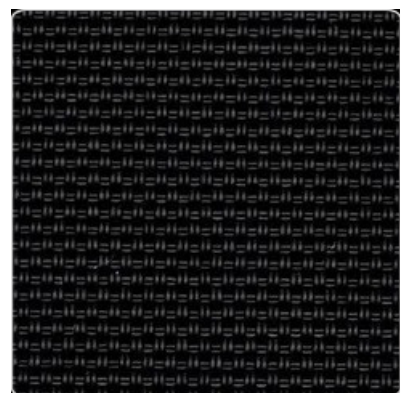

S1001-11
Onyx

Openness
Factor

1%

SERIES	S1001
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	13.9oz/yd² ± 5% 470g/m² ± 5%
OPENNESS FACTOR	AVERAGE 1%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	64/inch
FABRIC COUNT WEFT	42/inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	63N
TEAR RESISTANCE WEFT	120N
TENSILE STRENGTH WARP	1700N
TENSILE STRENGTH WEFT	1300N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)



Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING		
						INTERIOR		
						G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
1%	STYLE S1001							
	S1001-01	Ice White	18	72	10	0.34	0.24	15
	S1001-03	Sandstone	13	71	16	0.34	0.24	8
	S1001-04	Platinum	8	59	33	0.37	0.25	6
	S1001-06	Grey	6	46	48	0.41	0.26	3
	S1001-07	Mocha	6	42	52	0.43	0.27	4
	S1001-09	Toffee	2	13	85	0.51	0.29	2
	S1001-11	Onyx	2	5	93	0.54	0.30	2

RECOMMENDED USE



Commercial



Residential



Schools




Hospitality



Indoor Use
Only

Solview


S1003

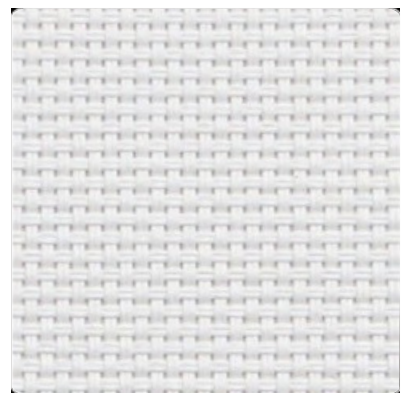


S1003-01
Ice White



S1003-03
Sandstone

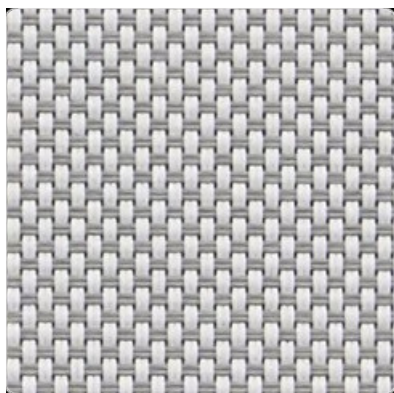


S1003-04
Platinum

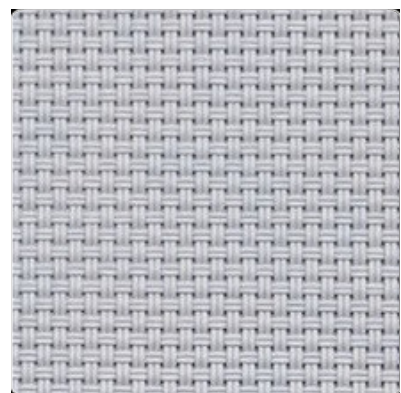

S1003-06
Grey



S1003-07
Mocha

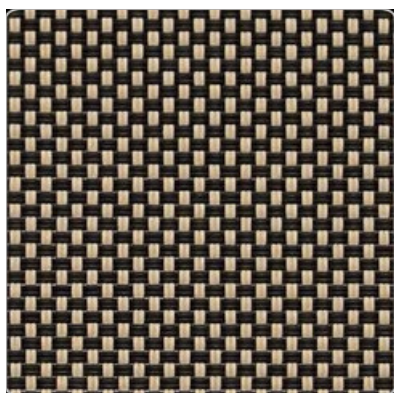

S1003-09
To ee



S1003-11
Onyx

Openness Factor **3%**

SERIES	S1003
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	13.0oz/yd ² ± 5% 440g/m ² ± 5%
OPENNESS FACTOR	AVERAGE 3%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	54/inch
FABRIC COUNT WEFT	46/inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	70N
TEAR RESISTANCE WEFT	94N
TENSILE STRENGTH WARP	1600N
TENSILE STRENGTH WEFT	1500N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)



Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING		
						INTERIOR		
						G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
3%	STYLE S1003							
	S1003-01	Ice White	18	67	15	0.35	0.25	15
	S1003-03	Sandstone	14	66	20	0.35	0.25	12
	S1003-04	Platinum	13	50	37	0.40	0.26	10
	S1003-06	Grey	9	42	49	0.43	0.27	7
	S1003-07	Mocha	10	34	56	0.45	0.27	8
	S1003-09	Toffee	6	16	78	0.51	0.29	6
	S1003-11	Onyx	6	5	89	0.54	0.30	6

RECOMMENDED USE



Commercial



Residential



Schools



Hospitality




Indoor Use
Only

Solview


S1005




S1005-01
Ice White

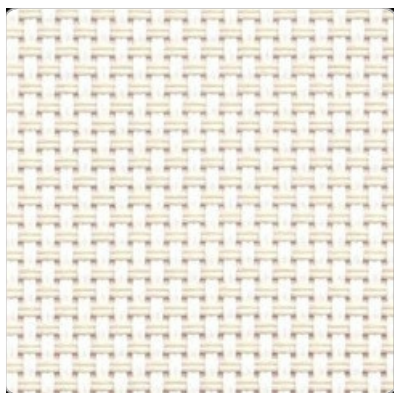

S1005-03
Sandstone

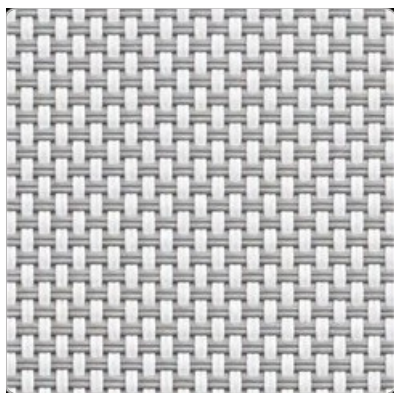

S1005-04
Platinum

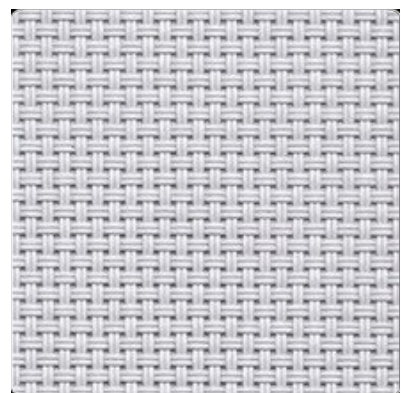


S1005-06
Grey



S1005-07
Mocha



S1005-09
To ee

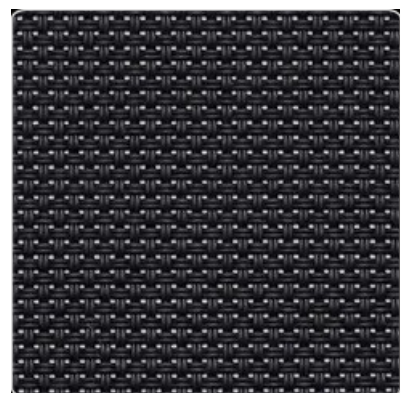

S1005-11
Onyx

Openness
Factor

5%

SERIES	S1005
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	12.4oz/yd ² ± 5% 420g/m ² ± 5%
OPENNESS FACTOR	AVERAGE 5%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	48/Inch
FABRIC COUNT WEFT	46/Inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	89N
TEAR RESISTANCE WEFT	88N
TENSILE STRENGTH WARP	1500N
TENSILE STRENGTH WEFT	1400N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)



Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING		
						INTERIOR		
						G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
5%	STYLE S1005							
	S1005-01	Ice White	27	68	5	0.35	0.25	23
	S1005-03	Sandstone	21	61	18	0.37	0.25	16
	S1005-04	Platinum	14	47	39	0.41	0.27	12
	S1005-06	Grey	12	42	46	0.43	0.27	10
	S1005-07	Mocha	12	33	55	0.45	0.28	10
	S1005-09	Toffee	10	18	72	0.50	0.29	9
	S1005-11	Onyx	10	5	85	0.54	0.30	9

RECOMMENDED USE



Commercial



Residential



Schools




Hospitality



Indoor Use
Only

Solview YG3009

99% Blackout

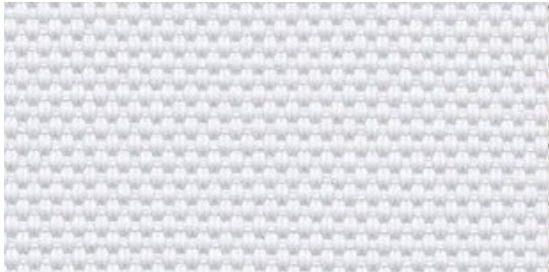


White
YG3009-2235-01




Birch
YG3009-2235-02




Platinum
YG3009-2235-03

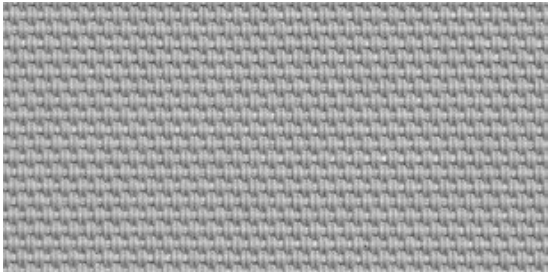

Cadet Grey
YG3009-03

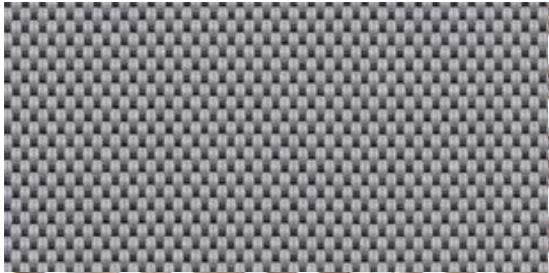

Smoke
YG3009-04

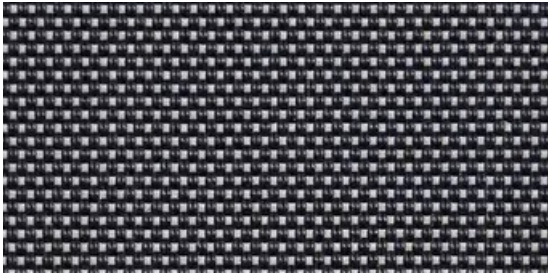


Charcoal
YG3009-5



Walnut
YG3009-06



Onyx
YG3009-7



Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.



APPLICATIONS:



Roller



Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007		SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES	
		FABRIC			FABRIC + GLAZING			
					INTERIOR			
					G-factor = total solar energy transmittance			
OF	Color Code	Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV	
	STYLE YG3009							
			0	6 9	3 1	0 . 3 4		0 . 2
		YG3009-2235-02 Birch	4		0 0	6 3	3 7	0 . 3
			6			0 . 2 5	0 0	5 8 4
		YG3009-03 Cadet Grey	2		0 . 3 7	0 . 2 5		0
			0	2 7	7 3	0 . 4 7		0 . 2
		YG3009-05 Charcoal	8		0 0	2 5	7 7	0 . 4
			8			0 . 2 8	0 0	1 0 9
		YG3009-07 Onyx	0		0 . 5 2	0 . 2 9		0

RECOMMENDED USE



Commercial



Residential




Schools



Hospitality



Indoor Use
Only

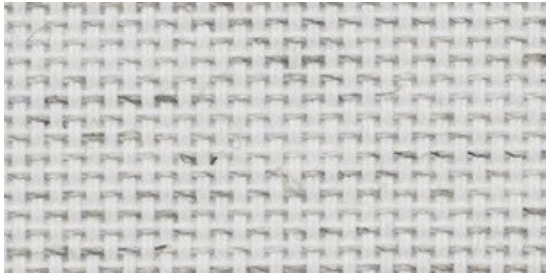

Parchment
SL005-01




Flax
SL005-02



Wheat
SL005-03




Pebble
SL005-04

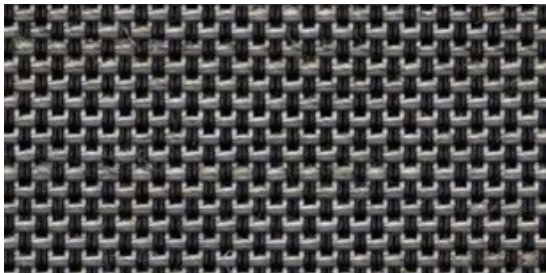


Flint
SL005-05




White Grey
S5005-01

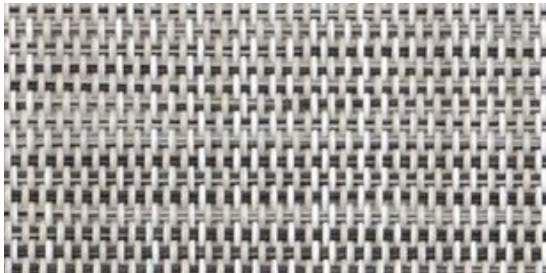

Duchess Grey
S5005-02

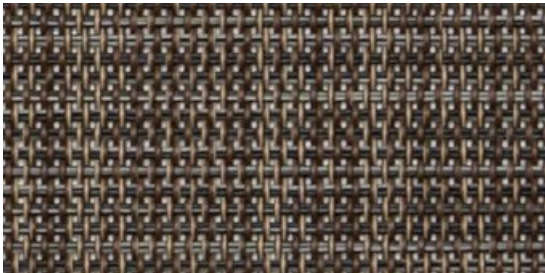

Bronze
S5005-03



APPLICATIONS:



Roller



Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007		SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES	
		FABRIC			FABRIC + GLAZING			
					INTERIOR			
					G-factor = total solar energy transmittance			
OF	Color Code	Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV	
	STYLE SL005							
			2 8	5 7		1 5	0 . 3 9	0 . 2
	SL005-2	Falx	6			2 4 2 2	6 1 1 7	0 . 3
	SL005-3	Wheat	7			0 . 2 5		1 7 2 4
								5
	SL005-4	Pebble	5	2 1		0 . 3 9		0 . 2
			6			2 0 1 5	4 9 3 6	0 . 4
	STYLE S5005							
			1			0 . 2 6		1 3 1 1
			4	7 5		0 . 5 1		0 . 2
			9			1 0 1 5	5 5 3 0	0 . 3
	S5005-2	Duchess Grey	9			0 . 2 6		1 3 1 2
			8	6 0		0 . 4 7		0 . 2
			9			1 4 1 0	9 8 1	0 . 5



Commercial



Residential



Schools




Hospitality



Indoor Use
Only

Solview S1005B



Laminated



Ice White
S1005B-01



Sandstone
S1005B-03



Silver
S1005B-05



Grey
S1005B-06



Mocha
S1005B-07




To ee
S1005B-09



Chocolate
S1005B-10



Onyx
S1005B-11



Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING		
						INTERIOR		
						G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
	STYLE S1005B							
			0	7 3	2 7	0 . 3 3		0 . 2
	S1005B-03	Sandstone	4			0 0	7 0 3 0	0 . 3
			4			0 . 2 4		0 0 7
	S1005B-06	Grey	2	2 5		0 . 3 3		0 . 2
			4			0 0	7 3 2 7	0 . 3
	S1005B-09	Toffee	3			0 . 2 4		0 0 7
	S1005B-10	Chocolate	3	2 7		0 . 3 3		0 . 2
	S1005B-11	Onyx	4			0 0	7 4 2 6	0 . 3
			2			0 . 2 4		0 0 7

RECOMMENDED USE



Commercial



Residential



Schools




Hospitality




Indoor Use
Only

Muralla Blackout

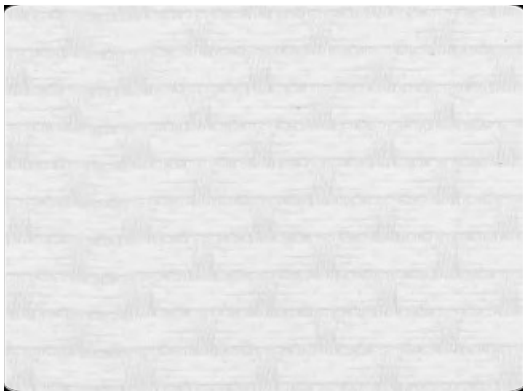


JL15701B
White

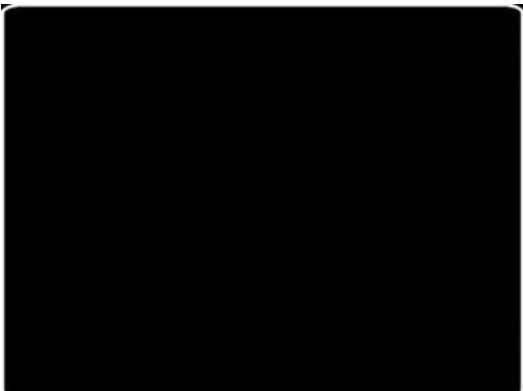

JL15702B
Ivo




JL15704B
Light Beige

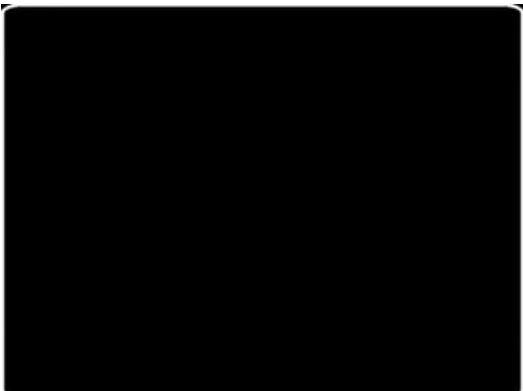

JL15706B
Grey



JL15710B
Khaki

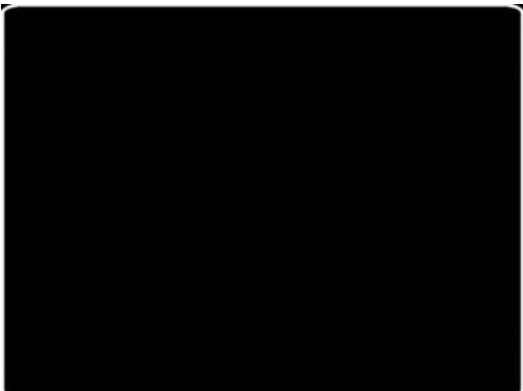

JL15709B
Black



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

4⁶⁰±5%(g/m²)
13.6±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Dichroic Blackout



JL2112B-1
White



JL2112B-3
Pewter



JL2112B-4
Nimbus



JL2112B-5
Flax

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
400±5%(g/m²)
11.8±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:




Roller



Panels


Ansari Blackout

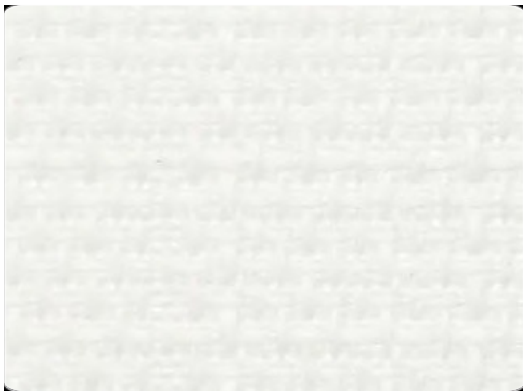

JL6W1
White




JL6W2
Beige

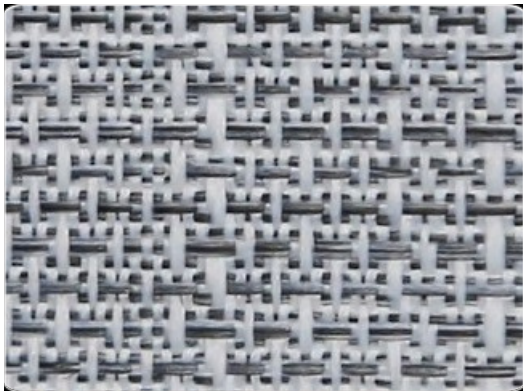

JL6W3
Fog Grey



JL6W4
Stone Grey

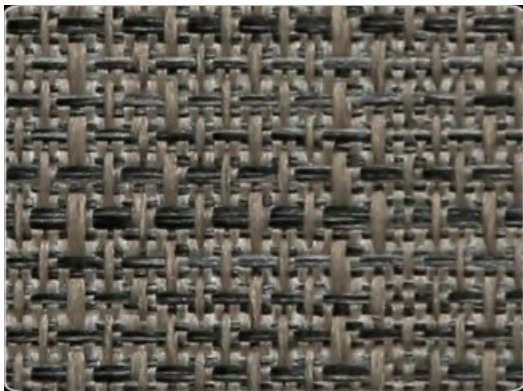

JL6W6
Earth Brown



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

410±5%(g/m²)
12.1±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:




Roller



Panels

Paddington Blackout




Laminated



JL1151
Plaster



JL1153
Flax

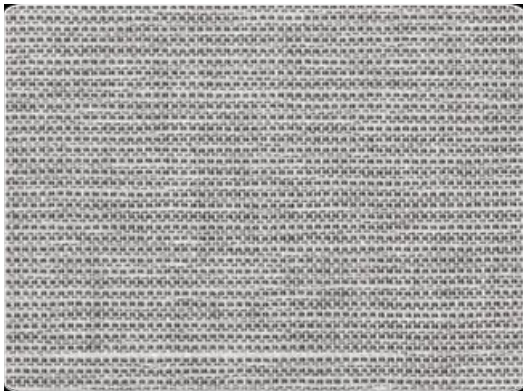

JL1155
Pebble



JL1156
Shadow



Composition
100%Polyester



Finished Width
(Ancho)
200cm/280cm
79"/110"



Weight
(Peso)
355±5%(g/m²)
10.5±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)
100%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:




Roller



Panels

Granville Blackout

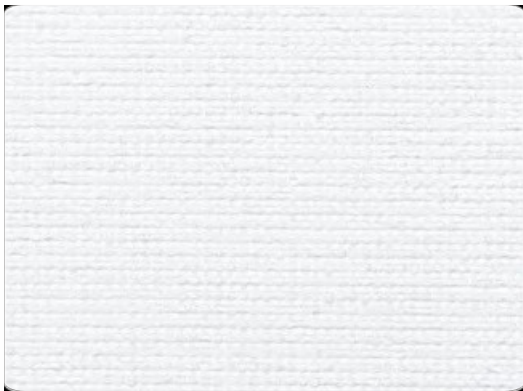

JL1591
Glacier



JL1592
Cotton



JL1593
Platinum



JL1594
Ash



JL1595
Raven



JL1596
Flax



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

300±5%(g/m²)
8.8±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:




Roller



Panels


Medlin Blackout

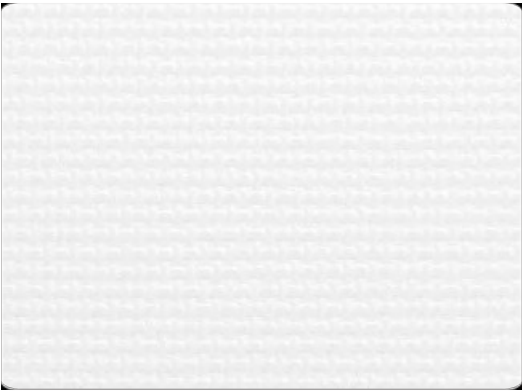

JL8801
Foggy White




JL8802
Sweet Corn

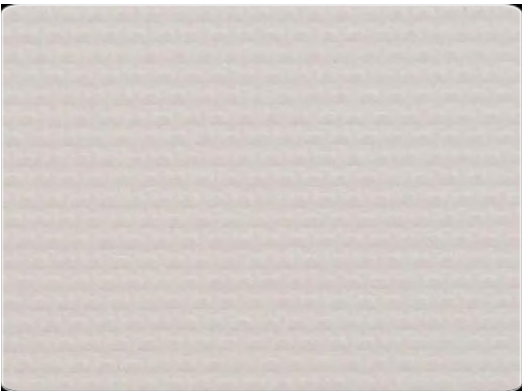

JL8804
Ea h



JL8807
Gray Violet

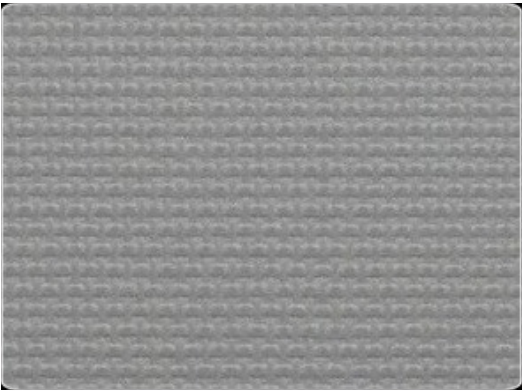

JL8811
Cement



JL8813
Charcoal

Composition
60%PVC+
40%Fiberglass

Finished Width
(Ancho)
183/200/250/300cm
72"/79"/98"/118"

Weight
(Peso)
430±5%(g/m²)
12.7±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller




Panels

Summerland Light Filtering




JL1561
Flax

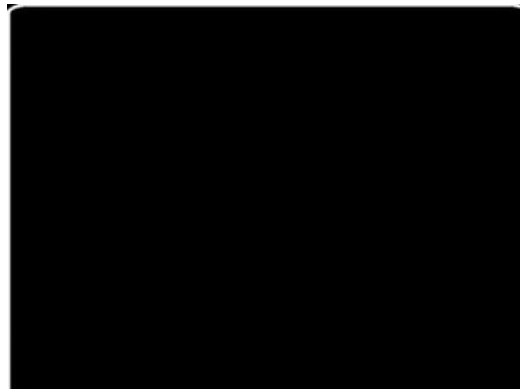

JL1562
Sand



JL1563
Echo Dune

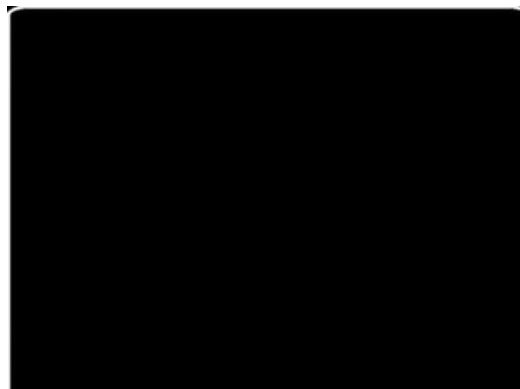

JL1564
Blend Nomad



JL1565
Stone Grey

 **Composition**
95%Polyester+
5% Linen

 **Weight
(Peso)**
230±5%(g/m²)
6.8±5%(oz/yd²)

 **Average Density
(Densidad)**
98%

 **Environment
(Medio ambiente)**
GREENGUARD

 **Finished Width
(Ancho)**
300/118"

 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Weft Deviation
(Desviación de trama)**
≤1%

 **UV Protection**

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Lino Light Filtering



JL1702
Sand



JL1703
Falx

 **Composition**
100%Polyester

 **Weight
(Peso)**
190±5%(g/m²)
5.6±5%(oz/yd²)

 **Average Density
(Densidad)**
98%

 **Environment
(Medio ambiente)**
GREENGUARD

 **Finished Width
(Ancho)**
1702: 215/280cm (85"/110")
1703: 200/280cm (79"/110")

 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Weft Deviation
(Desviación de trama)**
≤1%

 **UV Protection**

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:




UltrasonicCut

APPLICATIONS:



RollerPanels

Summerland Blackout

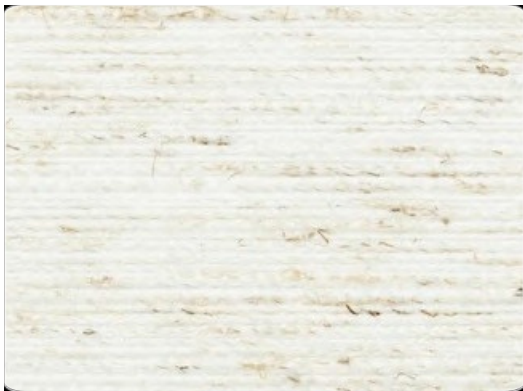

JL1561B
Flax



JL1562B
Sand



JL1563B
Echo Dune



JL1564B
Blend Nomad



JL1565B
Stone Grey



Composition

95%Polyester+
5% Linen



Finished Width
(Ancho)

300/118"



Weight
(Peso)

470±5%(g/m²)
13.9±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Allegro Light Filtering



JL2502
Cream



JL2503
Khaki



JL2511
Brown

 **Composition**
95%Polyester+
5% Linen

 **Weight**
(Peso)
260±5%(g/m²)
7.7±5%(oz/yd²)

 **Average Density**
(Densidad)
95%

 **Environment**
(Medio ambiente)
GREENGUARD

 **Finished Width**
(Ancho)
200/300cm
79"/118"

 **Light Fastness**
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

 **Weft Deviation**
(Desviación de trama)
≤1%

 **UV Protection**

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Allegro Blackout



JL15302B
Cream



JL15303B
Khaki



JL15311B
Brown

 **Composition**
95%Polyester+
5% Linen

 **Weight
(Peso)**
470±5%(g/m²)
13.9±5%(oz/yd²)

 **Blackout Rate
(Opacidad)**
100%

 **Environment
(Medio ambiente)**
GREENGUARD

**Finished Width
(Ancho)**
200/300cm
79"/118"
 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Weft Deviation
(Desviación de trama)**
≤1%

 **UV Protection**

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Estuco Blackout



JL2111B-1
Swan



JL2111B-6
Flax



JL2111B-7
Ash

Composition
100%Polyester

Finished Width
(Ancho)
220/300cm
87"/118"

Weight
(Peso)
410±5%(g/m²)
12.1±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller




Panels

Sydney Blackout




JL7701B
Chalk

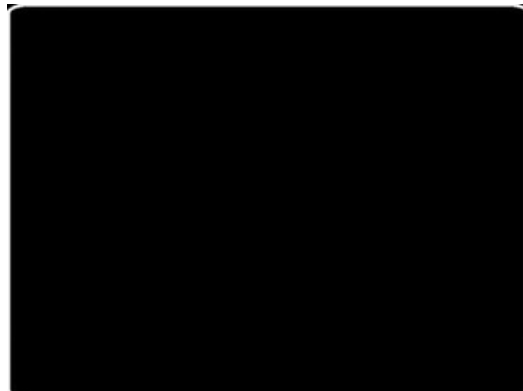

JL770LB
Lime stone



JL7706B
Anthracite

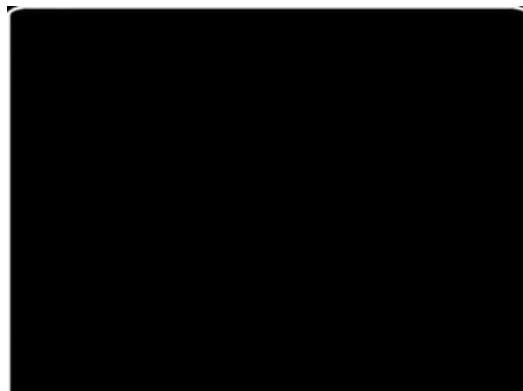

JL7712B
Black



Composition
100%Polyester



Finished Width
(Ancho)
220/300cm
87"/118"



Weight
(Peso)
370±5%(g/m²)
10.9±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)
100%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:




UltrasonicCut

APPLICATIONS:



Roller




Panels

Maderia Light Filtering




JL1521
Flax

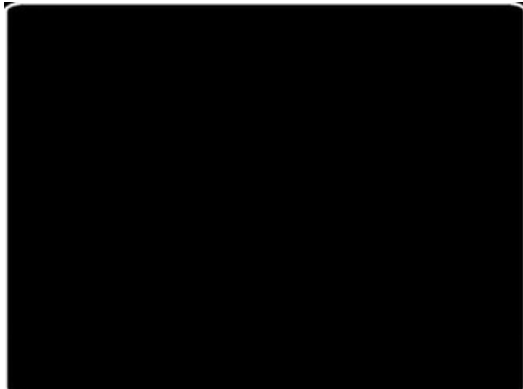

JL1522
Mint



JL1523
Dune

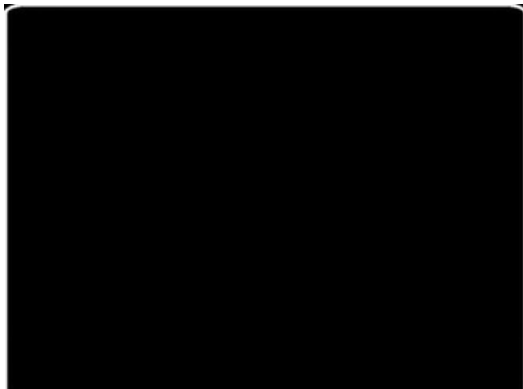

JL1524
Chocolate

 **Composition**
100%Polyester

 **Finished Width
(Ancho)**
300cm/118"

 **Weight
(Peso)**
215±5%(g/m²)
6.3±5%(oz/yd²)

 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Average Density
(Densidad)**
98%

 **Weft Deviation
(Desviación de trama)**
≤1%

 **Environment
(Medio ambiente)**
GREENGUARD

 **UV Protection**


Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.



APPLICATIONS:



Roller



Panels

Capetown Light Filtering



JL1490
Ice White




JL1491
Star White



JL1492
Silver Birch



JL1493
Moonstruck

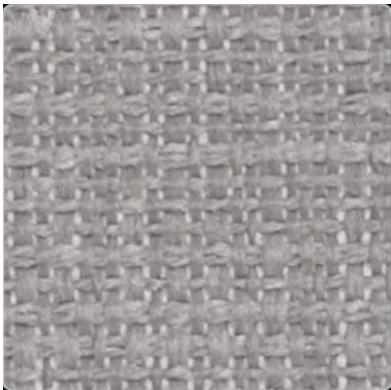

JL1494
December Sky



JL1495
Camel



JL1496
Pewter



JL1497
Black Oyster



Composition
100%Polyester



Finished Width
(Ancho)
300cm/118"



Weight
(Peso)
225±5%(g/m²)
6.6±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Average Density
(Densidad)
98%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Capetown Blackout



JL1491B
Star White



JL1492B
Silver Birch




JL1493B
Moonstruck



JL1494B
December Sky



JL1495B
Camel

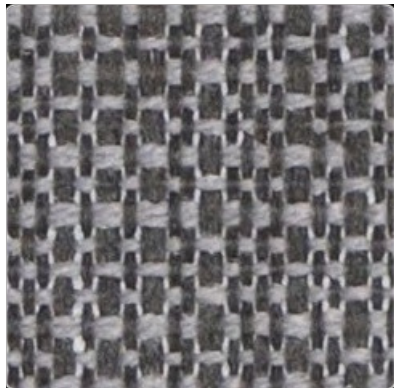

JL1496B
Pewter



JL1497B
Black Oyster



Composition
100%Polyester



Finished Width
(Ancho)
300cm/118"



Weight
(Peso)
440±5%(g/m²)
13.0±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)
100%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:




UltrasonicCut

APPLICATIONS:



Roller



Panels


Cambria Light Filtering



JL29601
Cotton



JL29613
Khaki

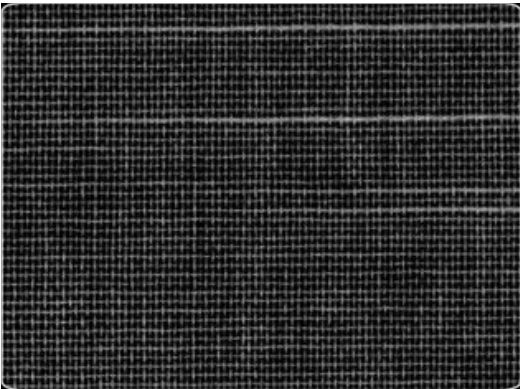

JL29616
Coal



JL2960
4
Oatmeal



JL29615
Steel

 **Composition**
100%Polyester

 **Finished Width
(Ancho)**
280cm/110.2"

 **Weight
(Peso)**
170±5%(g/m²)
5.0±5%(oz/yd²)

 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Average Density
(Densidad)**
99%

 **Weft Deviation
(Desviación de trama)**
≤1%

 **Environment
(Medio ambiente)**
GREENGUARD

 **UV Protection**


Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.



APPLICATIONS:



Roller




Panels

Cambria Blackout




JL29704B
Oatmeal

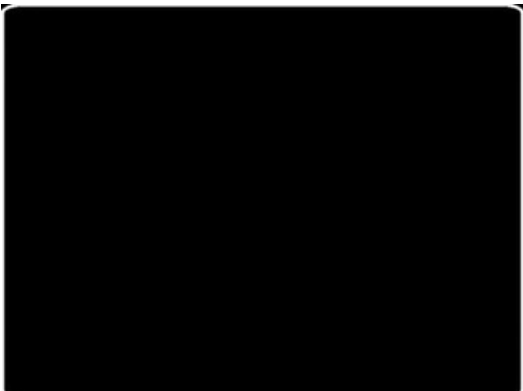

JL29713B
Khaki



JL29715B
Steel

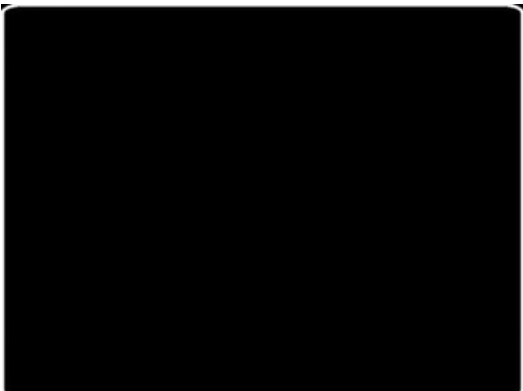

JL29716B
Coal



Composition

100%Polyester



Finished Width
(Ancho)

280cm/110.2"



Weight
(Peso)

360±5%(g/m²)
13.6±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Baltimore Light Filtering



JL13701
Porcelain



JL13702
Cream



JL13703
Platinum



JL13704
Birch




JL13705
Putty



JL13706
Pebble



JL13707
Copper

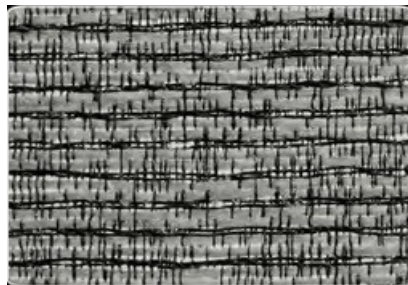

JL13708
Anthracite



JL13709
Bronze



JL13710
Flint

 **Composition**
100%Polyester

 **Finished Width
(Ancho)**
300cm/118"

 **Weight
(Peso)**
210±5%(g/m²)
6.2±5%(oz/yd²)

 **Light Fastness
(Solidez a la luz)**
≥6Grade
(ISO 105 B02)

 **Average Density
(Densidad)**
95%

 **Weft Deviation
(Desviación de trama)**
≤1%

 **Environment
(Medio ambiente)**
GREENGUARD

 **UV Protection**

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:




UltrasonicCut

APPLICATIONS:



Roller



Panels

Baltimore Blackout



JL13701B
Porcelain



JL13702B
Cream



JL13703B
Platinum



JL13704B
Birch



JL13705B
Putty



JL13706B
Pebble



JL13707B
Copper



JL13708B
Anthracite



JL13709B
Bronze



JL13710B
Flint



Composition
100%Polyester



Finished Width
(Ancho)
300cm/118"



Weight
(Peso)
530±5%(g/m²)
15.6±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)
100%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Bermuda Light Filtering



JL14700
Snow



JL14701
Stella



JL14703
Pearl



JL14705
Terrace



JL14709
To ee



JL14710
Grey



JL14711
Basalt



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

210±5%(g/m²)

6.2±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade

(ISO 105 B02)



Average Density
(Densidad)

95%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Bermuda Blackout



JL14701B
Stella



JL14702B
Oyster



JL14705B
Terrace



JL14709B
To ee



JL14710B
Grey



JL14711B
Basalt



Composition
100%Polyester



Finished Width
(Ancho)
300cm/118"



Weight
(Peso)
430±5%(g/m²)
12.6±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)
100%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Abura Light Filtering



JL1621
Swan



JL1622
Linen



JL1623
Vanilla



JL1624
Straw



JL1625
Caribou



JL1626
Bliss Smoke



JL1627
Bliss Smoke



JL1628
Blend Coal



Composition
100%Polyester



Finished Width
(Ancho)
300cm/118"



Weight
(Peso)
245±5%(g/m²)
7.2±5%(oz/yd²)



Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)



Average Density
(Densidad)
98%



Weft Deviation
(Desviación de trama)
≤1%



Environment
(Medio ambiente)
GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:



Roller



Panels

Abura Blackout



JL1621B
Swan



JL1622B
Linen



JL1623B
Vanilla



JL1624B
Straw



JL1625B
Caribou



JL1626B
Bliss Smoke



JL1627B
Bliss Smoke



JL1628B
Blend Coal



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

305±5%(g/m²)
9.0±5%(oz/yd²)



Light Fastness
(Solidez a la luz)

≥6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

≤1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut

APPLICATIONS:




Roller



Panels


Lanai Blackout

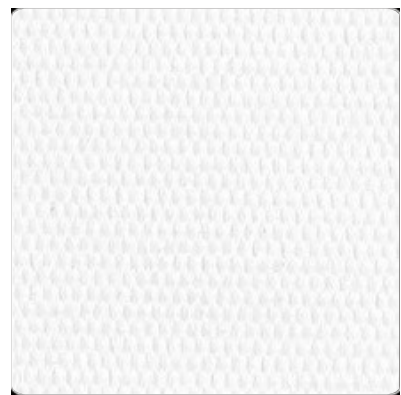


JL0031
Ice White



JL0032
Calico

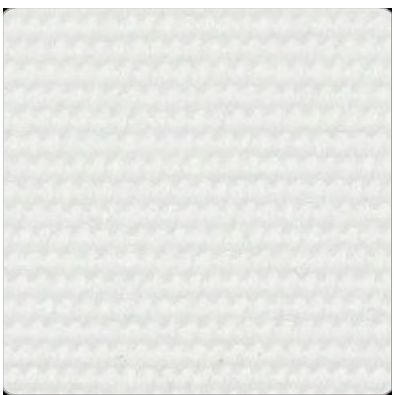

JL0033
Ivo

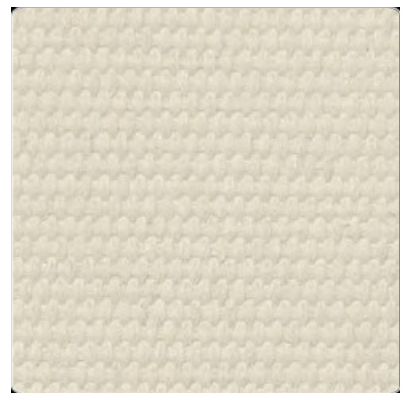

JL0034
Vanilla



JL0035
Lt Grey



JL0036
Dk Grey



JL0037
Chocolate



JL0038
Graphite



Composition

100%Polyester



Finished Width
(Ancho)

300cm/118"



Weight
(Peso)

410 $\pm$ 5%(g/m²)
12.1 $\pm$ 5%(oz/yd²)



Light Fastness
(Solidez a la luz)

$\geq$ 6Grade
(ISO 105 B02)



Blackout Rate
(Opacidad)

100%



Weft Deviation
(Desviación de trama)

$\leq$ 1%



Environment
(Medio ambiente)

GREENGUARD



UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:



UltrasonicCut


APPLICATIONS:




Roller



Panels

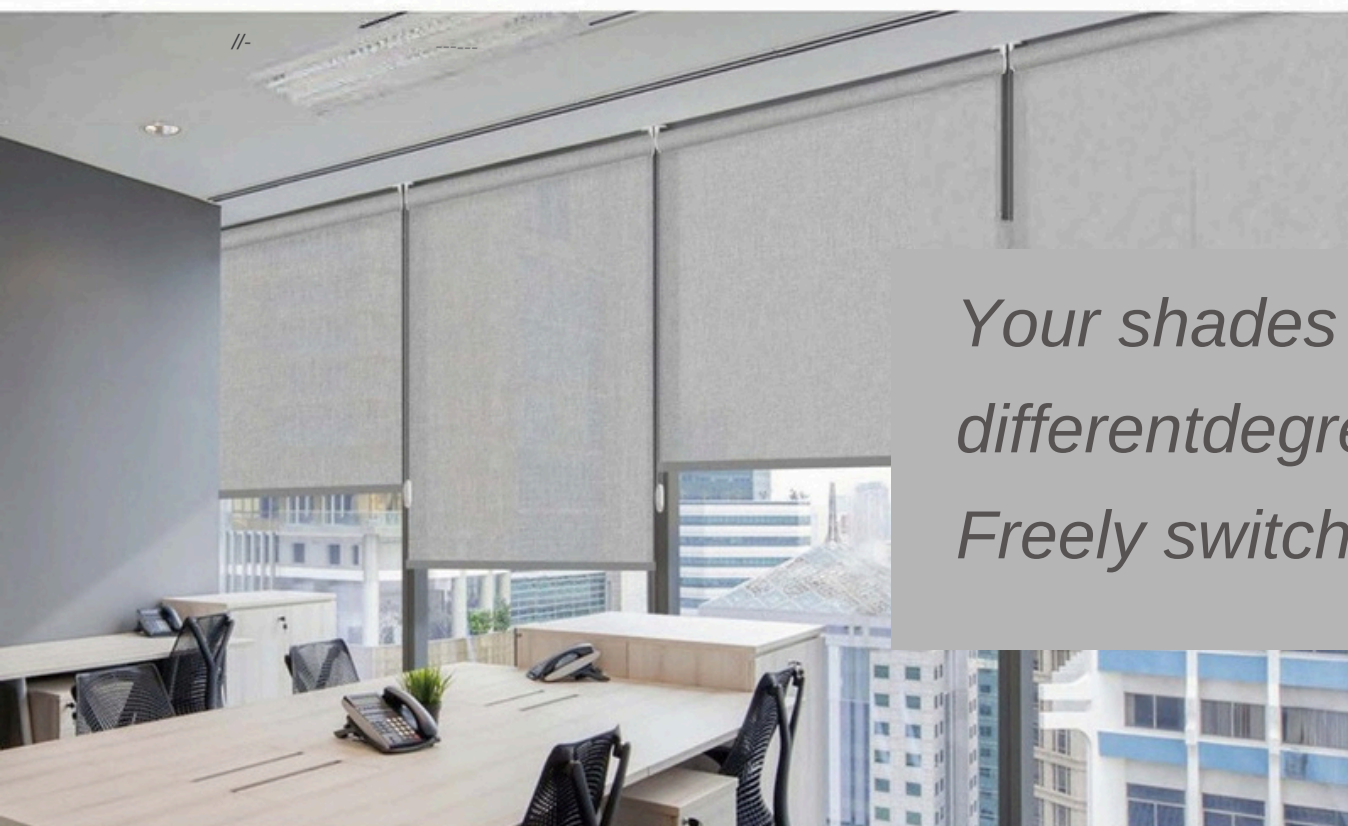

*Your shades expert, fabrics with
differentdegrees of shading needs.
Freely switch between light transmission*

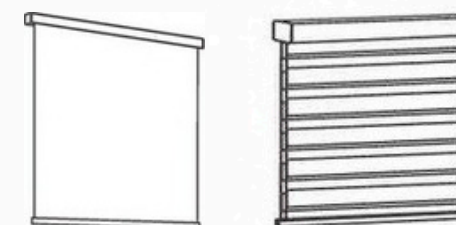

Modern Stylish
minimalism

BEATUOTIYFOUULLRY E DXIPFEFCUTSAETLIIOG

*The whole house
customization services.*



**ROCKPORT
TRADING
ZEBRA
BLINDS &
ROLLER
SHADES**